

Technical data

Voltage	U	240/420	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	580	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	4.6/2.7	A
Maximum current	I _{max}	4.9/2.8	A
Cos φ		0.8	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		72.9	kg
Packing dimensions		190x1000x1000	mm

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0 Pa 45000 m³/h
50 Pa 33400 m³/h

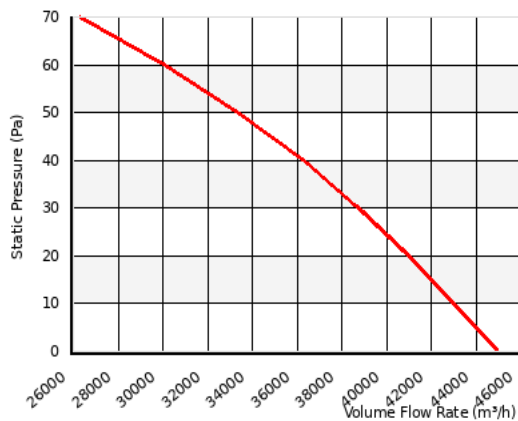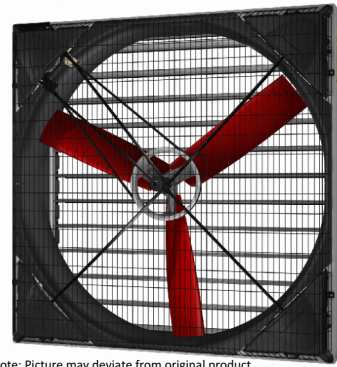

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

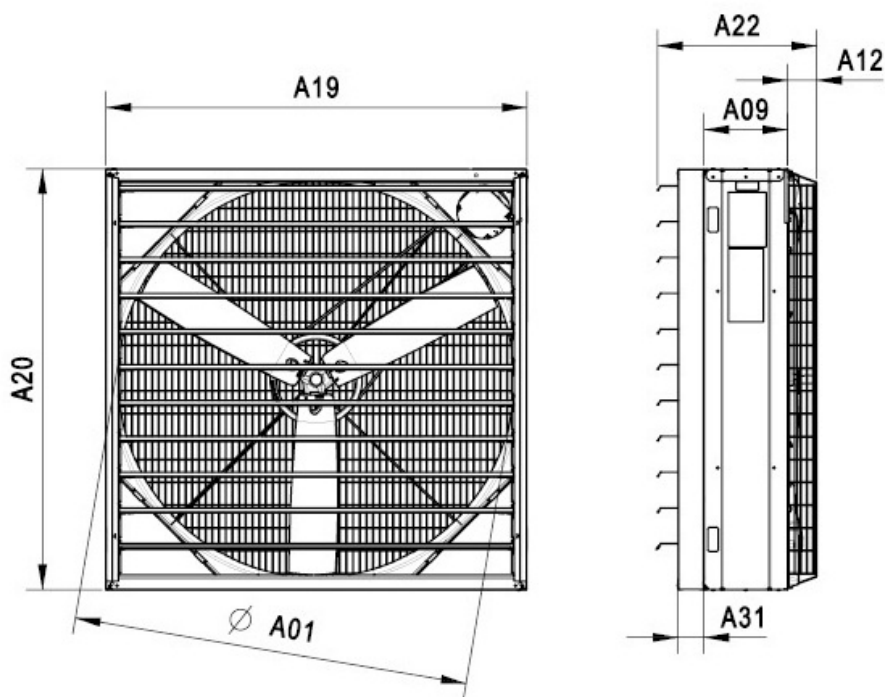

A01:	1284 mm
A09:	275 mm
A12:	96 mm
A19:	1382 mm
A20:	1382 mm
A22:	523 mm
A31:	85 mm