

Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1160	RPM
Power consumption	P _e	170	W
Nominal current	I _{nom}	0.9/0.5	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.41	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		30.5	Lbs.
Packing dimensions		23.6x23.6x15.7	inch

Fan details


Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	3620 CFM
0.12 in. wg	3060 CFM

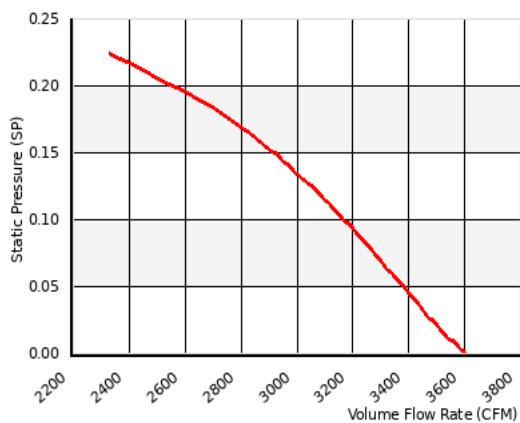

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



