



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	955	RPM
Power consumption	P _e	155	W
Nominal current	I _{nom}	0.9/0.5	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.44	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _{p (meas.)}	45	db(A)
Sound pressure level (23 ft)	L _{p (calc.)}	34	db(A)
Weight		34.8	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details

Impeller blades	8
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	2970 CFM
-------------	----------



Please note: Picture may deviate from original product

Approval(s)

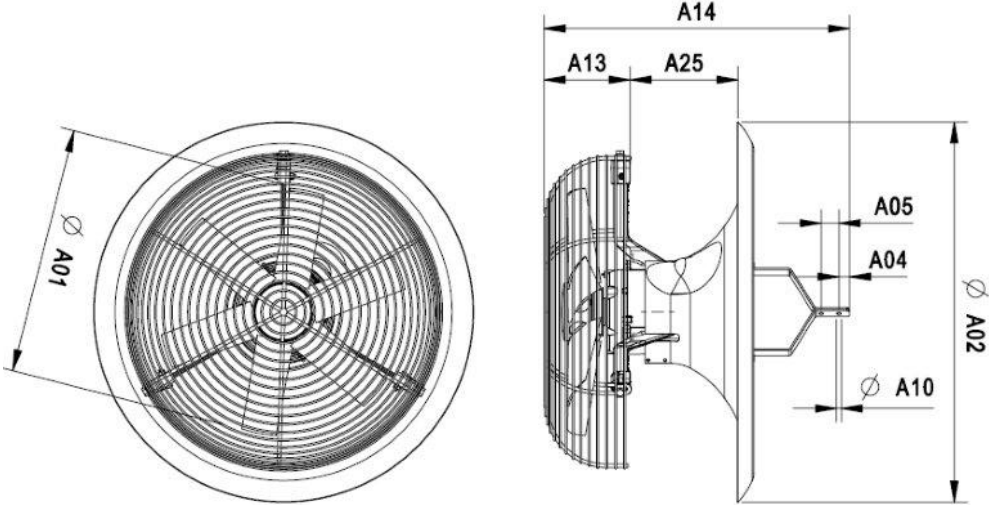


Wiring diagram
C11 - 3 Phase - Y connection - CW



Article number: T6D40A0M81160

Circulation fans

Dimensions			
		A01:	16.5 inch
		A02:	25.6 inch
		A04:	0.7 inch
		A05:	1.2 inch
		A10:	0.3 inch
		A13:	5.7 inch
		A14:	21.2 inch
		A25:	7.2 inch