



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1460	RPM
Power consumption	P _e	1400	W
Nominal current	I _{nom}	5.2/3	A
Maximum current	I _{max}	5.5/3.2	A
Cos φ		0.67	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	79	dB(A)
Sound pressure level (7 m)	L _p (calc.)	69	dB(A)
Weight		25.8	kg
Packing dimensions		800x790x395	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa	17900 m ³ /h
150 Pa	13900 m ³ /h

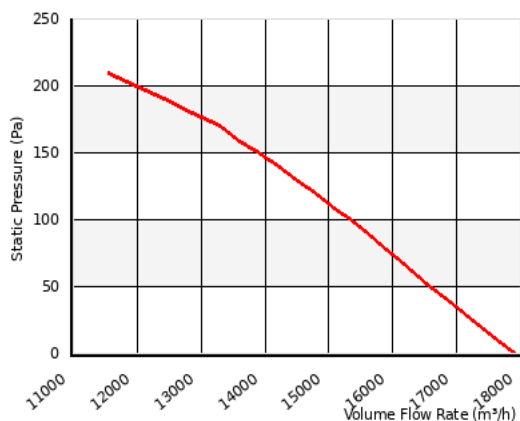


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

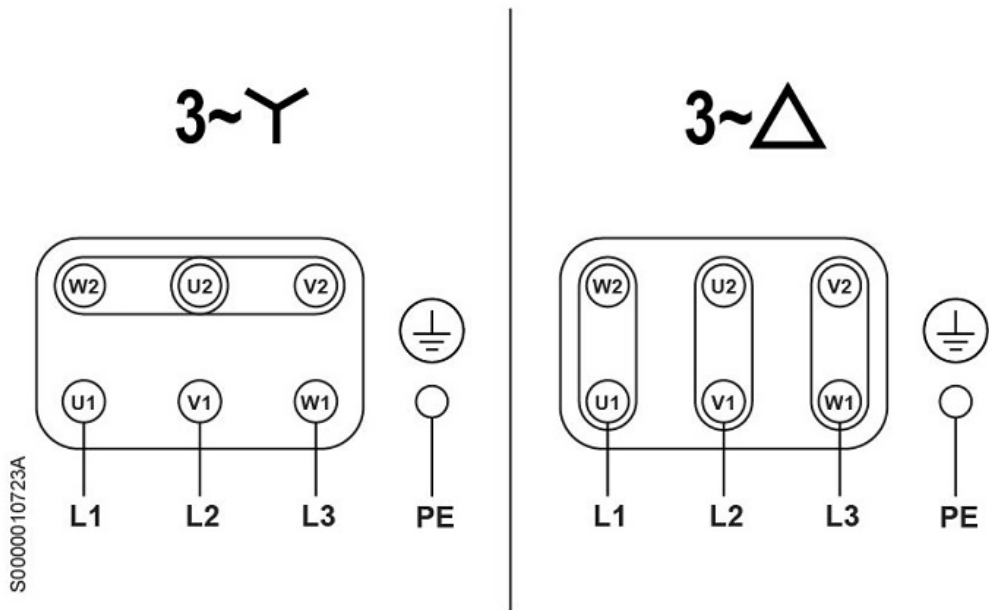

Dimensions

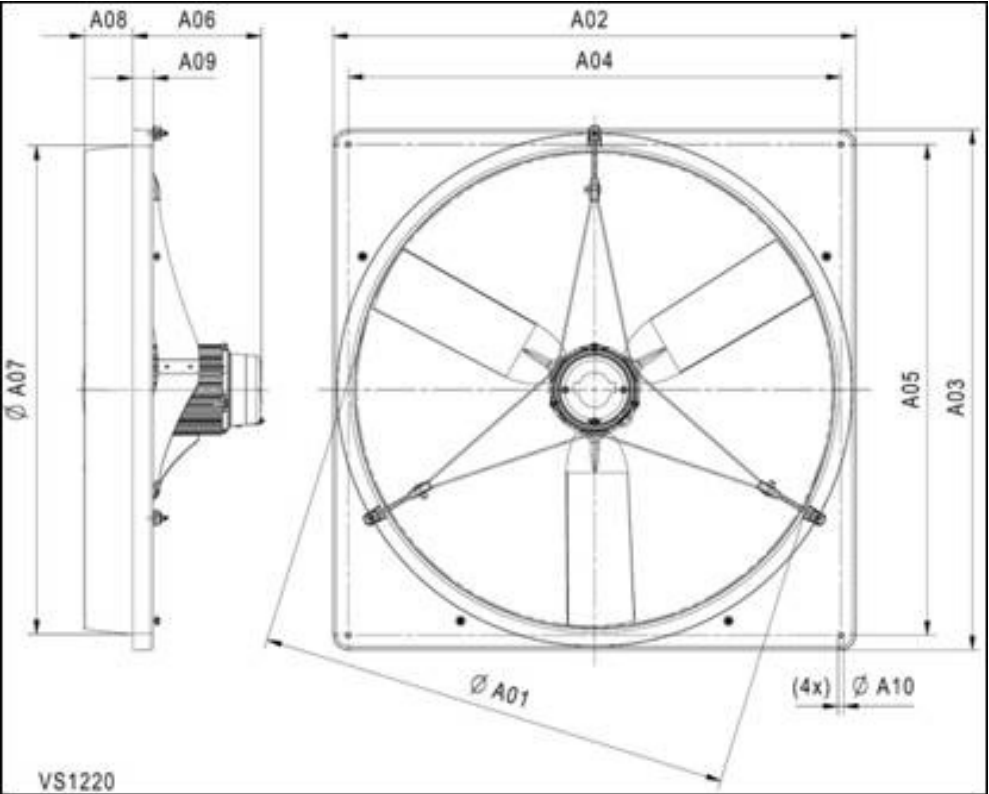

A01:	646 mm
A02:	775 mm
A03:	775 mm
A04:	715 mm
A05:	715 mm
A06:	247 mm
A07:	670 mm
A08:	105 mm
A09:	40 mm
A10:	10 mm

