



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	365	RPM
Power consumption	P _e	750	W
Nominal current	I _{nom}	2.4/1.4	A
Maximum current	I _{max}	2.7/1.6	A
Cos φ		0.78	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	66	dB(A)
Sound pressure level (7 m)	L _p (calc.)	55	dB(A)
Weight		28.1	kg
Packing dimensions		802x402x426	mm

Fan details


Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa	41200 m ³ /h
------	-------------------------




Please note: Picture may deviate from original product

Approval(s)




Wiring diagram
C11 - 3 Phase - Y connection - CW

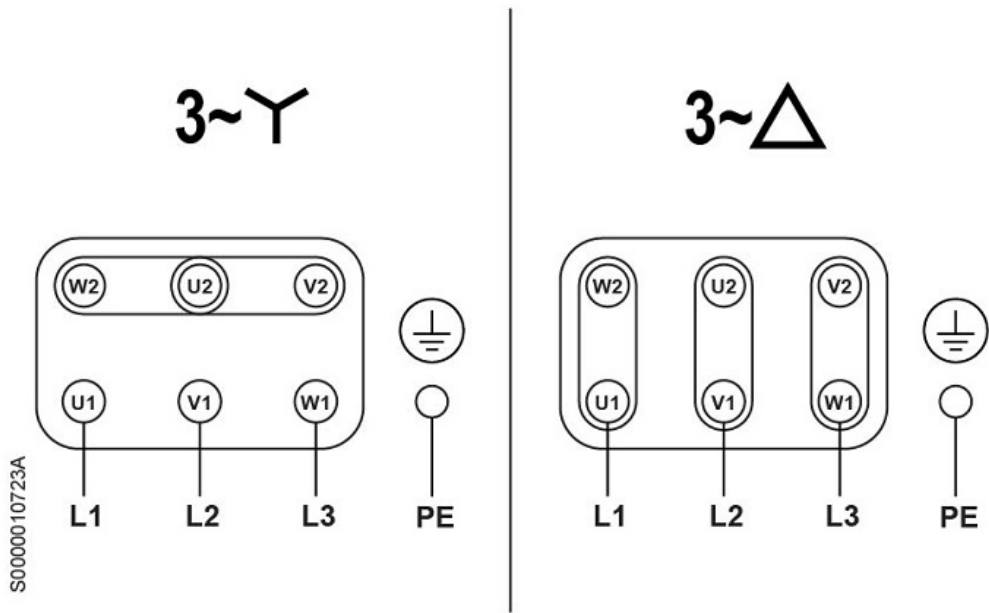

Article number: D4D15B2M16200

Airbreeze fans

Dimensions

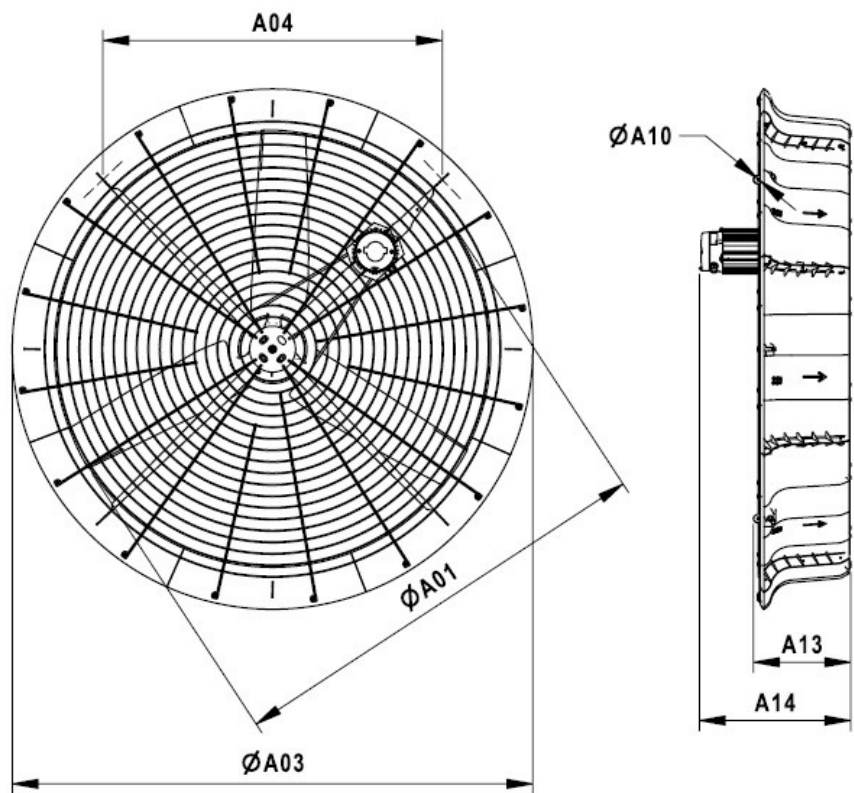

A01:	1524 mm
A03:	1810 mm
A04:	1180 mm
A10:	15 mm
A13:	339 mm
A14:	536 mm