



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1435	RPM
Power consumption	P _e	110	W
Nominal current	I _{nom}	0.5/0.3	A
Maximum current	I _{max}	0.5/0.3	A
Cos φ		0.58	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	59	dB(A)
Sound pressure level (7 m)	L _p (calc.)	48	dB(A)
Weight		8.4	kg
Packing dimensions		460x460x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

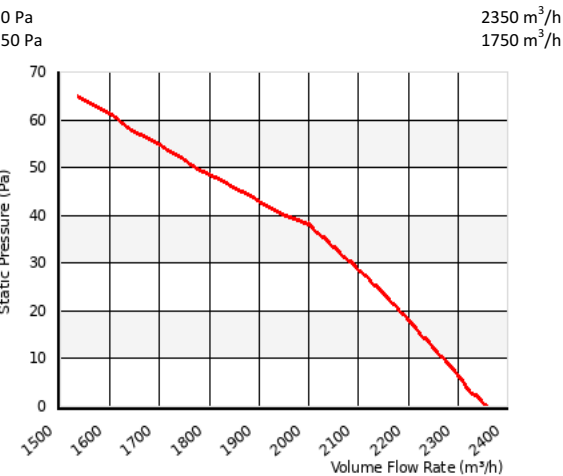


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

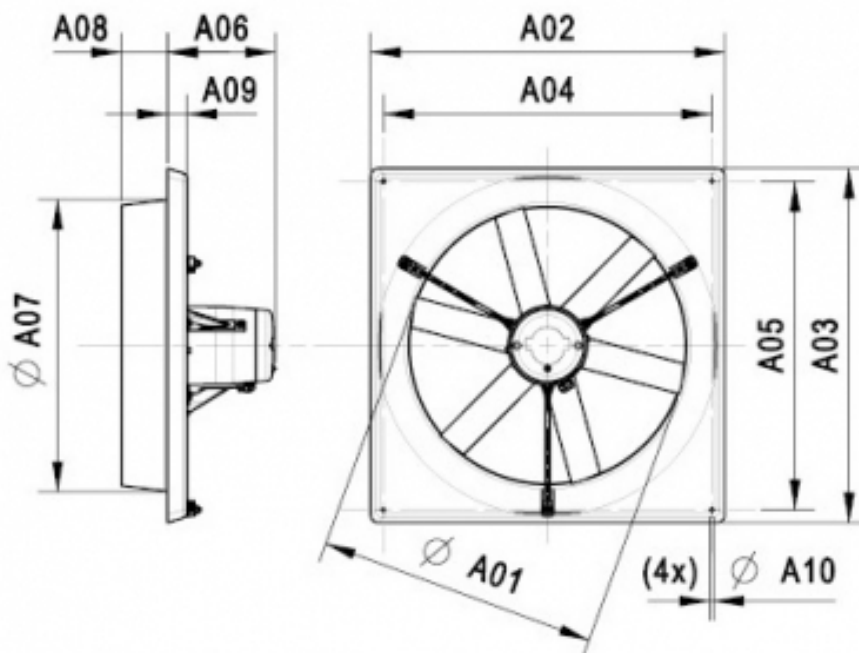

Dimensions	
	A01: 312 mm
	A02: 442.5 mm
	A03: 442.5 mm
	A04: 395 mm
	A05: 395 mm
	A06: 192 mm
	A07: 340 mm
	A08: 84 mm
	A09: 36 mm
	A10: 7.5 mm

