Article number: V4E13P1M11236

Galvanised box fans

Multifan

Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	585	RPM
Power consumption	P_e	1450	W
Nominal current	I_{nom}	9.9	A
Maximum current	I_{max}	10.5	A
Cos ϕ		0.64	
Capacitor		-	µF/V
Ambient temperature	$T_{amb\ min/max}$	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		182.4	Lbs.

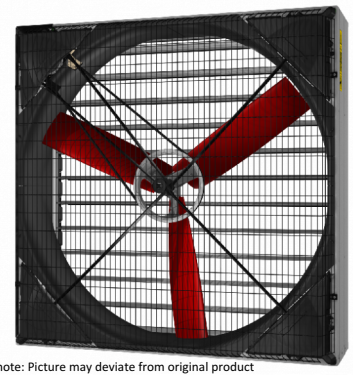

Please note: Picture may deviate from original product

Fan details

Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Approval(s)

CE

ErP 2026 COMPLIANT

Characteristics

0.00 in. wg	26200 CFM
0.20 in. wg	19900 CFM

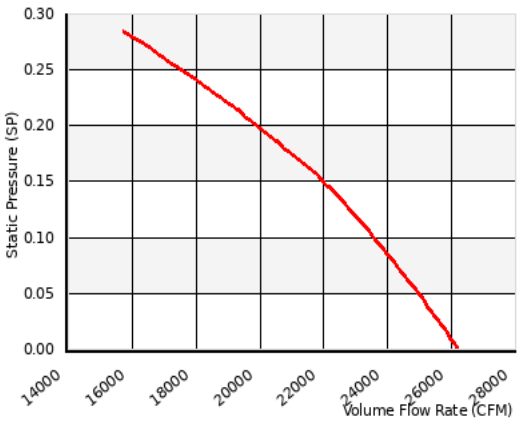

Speed control diagram

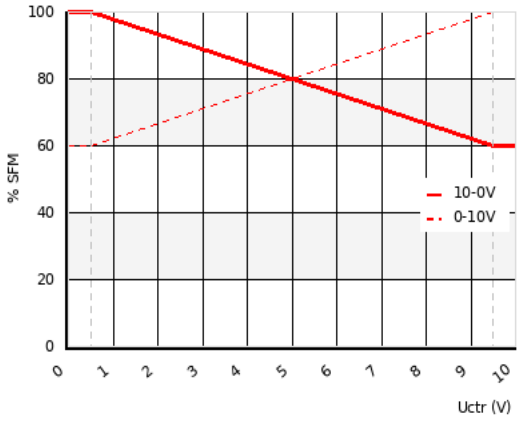

VOSTERMANS VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Version 3.0 23Oct2025

Article number: V4E13P1M11236

Galvanised box fans

Dimensions

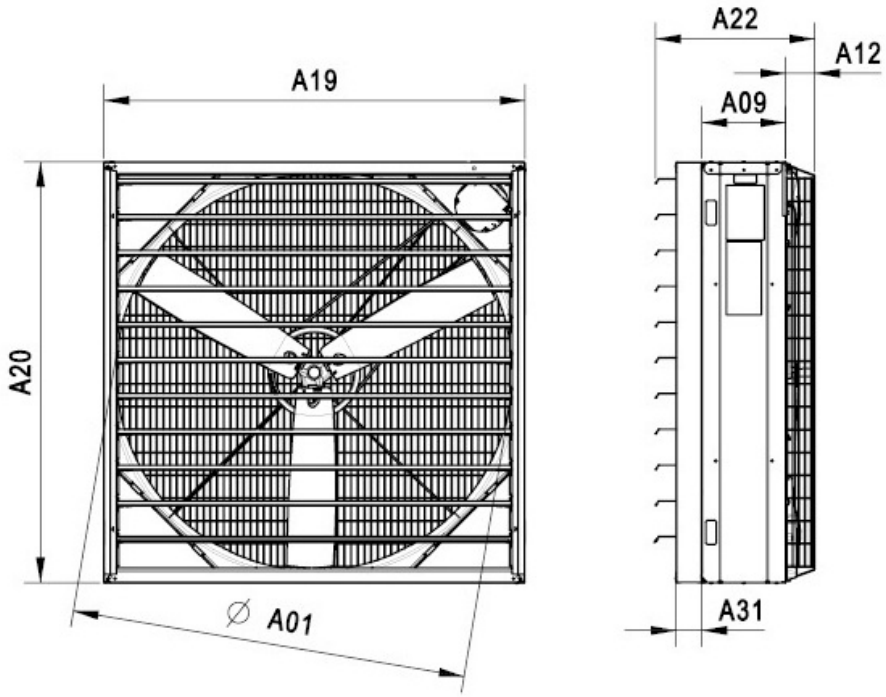

A01:	50.6 inch
A09:	10.8 inch
A12:	3.8 inch
A19:	54.4 inch
A20:	54.4 inch
A22:	20.6 inch
A31:	3.3 inch

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com