



Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	640	RPM
Power consumption	P _e	1650	W
Nominal current	I _{nom}	11.5	A
Maximum current	I _{max}	15.0	A
Cos φ		0.63	
Capacitor		-	μF/V
Service factor current		15.0	A
Ambient temperature	T _{amb min/max}	-10...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Weight		115.9	kg



Fan details

Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

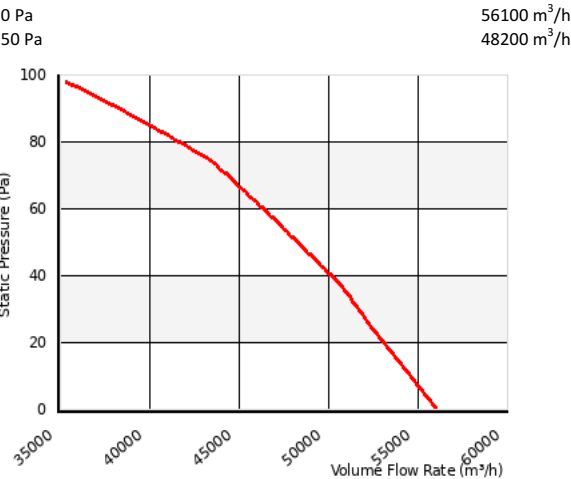

Please note: Picture may deviate from original product

Approval(s)




No.17386





Wiring diagram

BQ01 - 1 Phase ECplus controller --

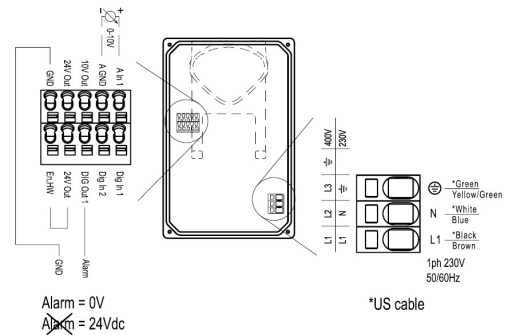

Article number: C4E13P3M10241

FC fans - High volume

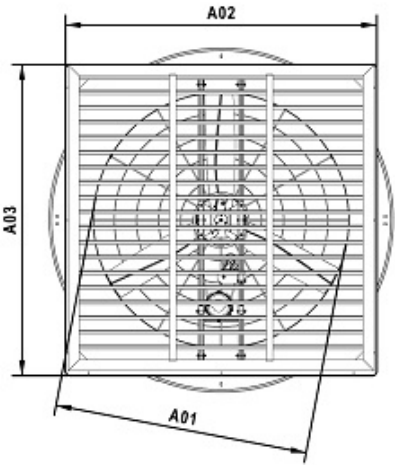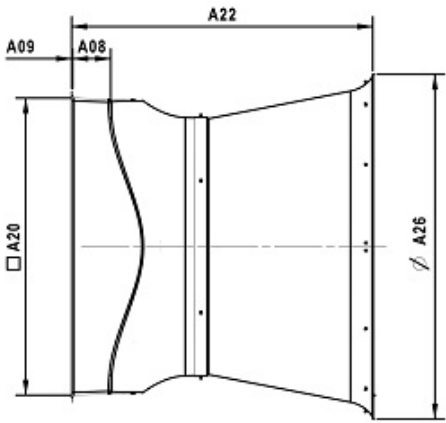Dimensions			
		A01:	1278 mm
		A02:	1530 mm
		A03:	1530 mm
		A08:	178 mm
		A09:	9 mm
		A20:	1441 mm
		A22:	1600 mm
		A26:	1769 mm