

Technical data

Voltage	U	240	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1695	RPM
Power consumption	P _e	290	W
Nominal current	I _{nom}	1.4	A
Maximum current	I _{max}	1.7	A
Cos φ		0.92	
Capacitor		06/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		44.3	kg

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 7100 m³/h
50 Pa 6050 m³/h

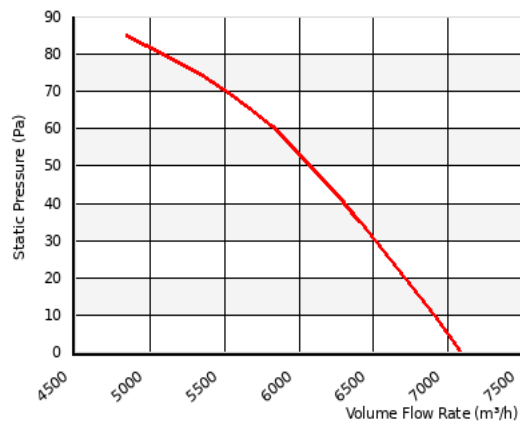


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

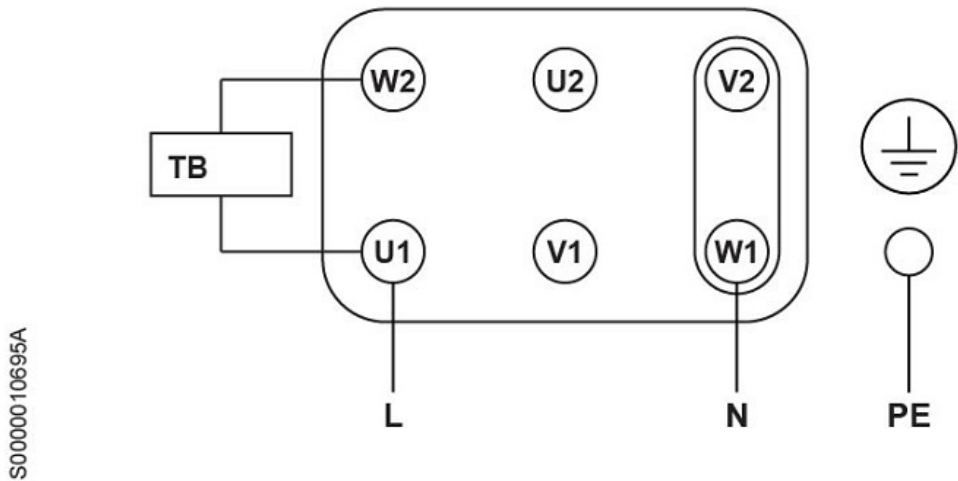

Dimensions

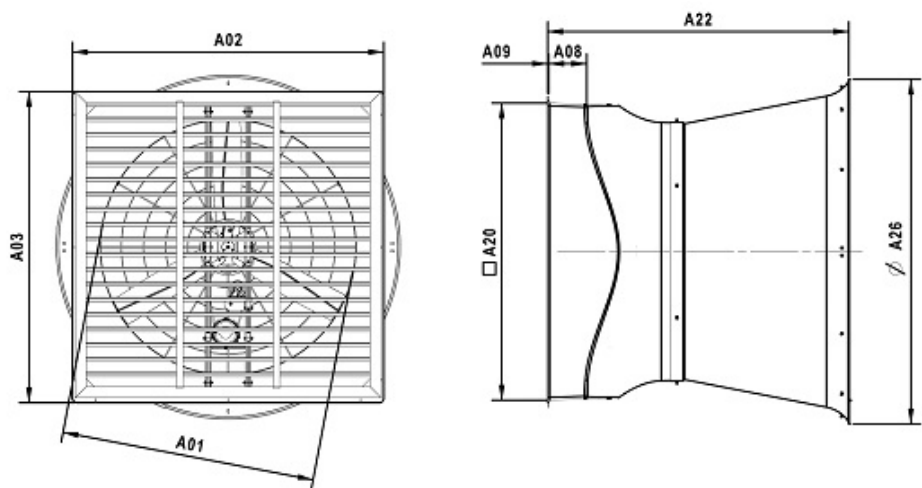

A01:	450 mm
A02:	689 mm
A03:	689 mm
A08:	205 mm
A09:	8 mm
A20:	600 mm
A22:	786 mm
A26:	644 mm