



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	555	RPM
Power consumption	P _e	1600	W
Nominal current	I _{nom}	7.2	A
Maximum current	I _{max}	9.4	A
Cos φ		0.96	
Capacitor		32/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	75	dB(A)
Sound pressure level (7 m)	L _p (calc.)	64	dB(A)
Weight		130.2	kg

Fan details


Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0 Pa 58600 m³/h
50 Pa 48000 m³/h

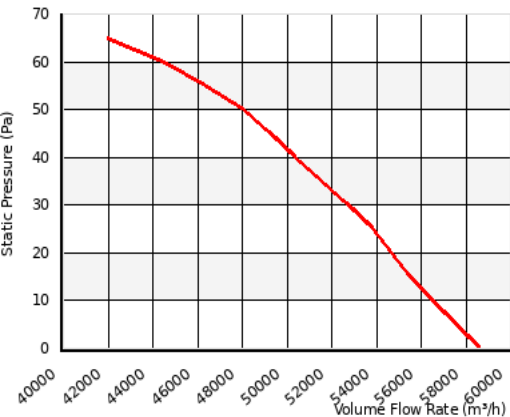

Please note: Picture may deviate from original product



No.15517



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com


Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com


Wiring diagram

C1 - 1 Phase - Standard Startup Capacitor - CW

S0000010695A

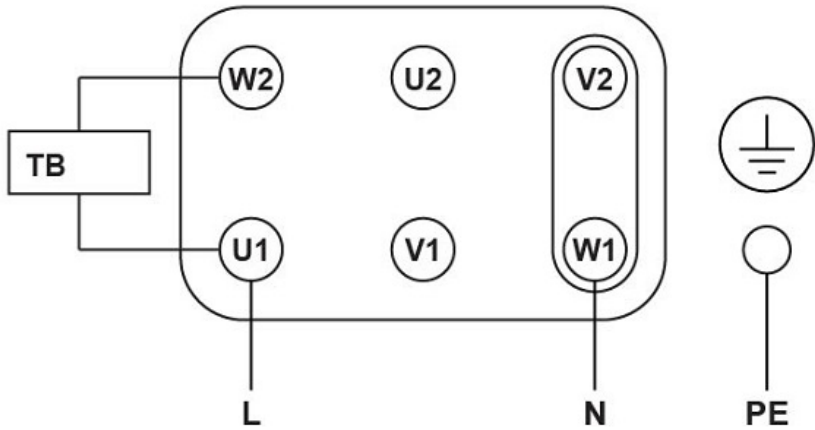

Dimensions

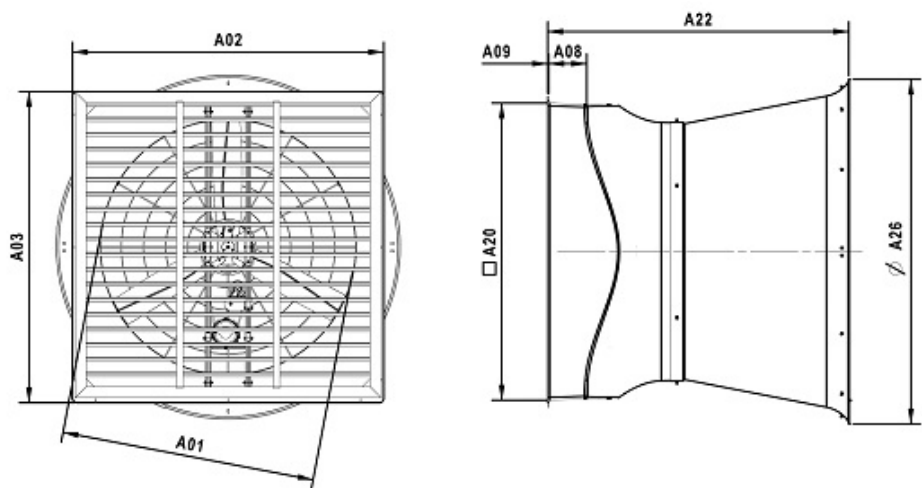

A01:	1369 mm
A02:	1710 mm
A03:	1710 mm
A08:	179 mm
A09:	10 mm
A20:	1621 mm
A22:	1650 mm
A26:	1874 mm