



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1165	RPM
Power consumption	P _e	1050	W
Nominal current	I _{nom}	3.8/2.2	A
Maximum current	I _{max}	4.7/2.7	A
Cos φ		0.6	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	83	dB(A)
Sound pressure level (7 m)	L _p (calc.)	73	dB(A)

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa 21500 m³/h
100 Pa 15800 m³/h

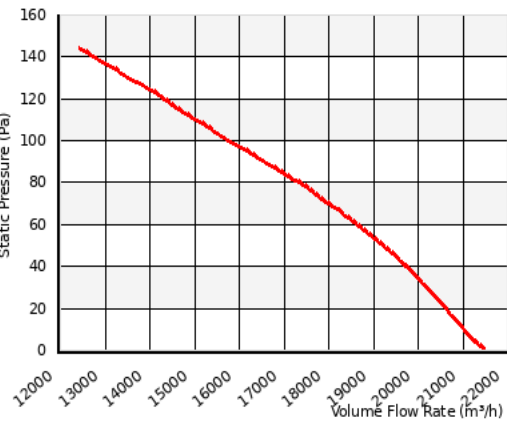

Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com


Wiring diagram
C11 - 3 Phase - Y connection - CCW



Article number: V6D92KAM70100

Panel fans

Dimensions

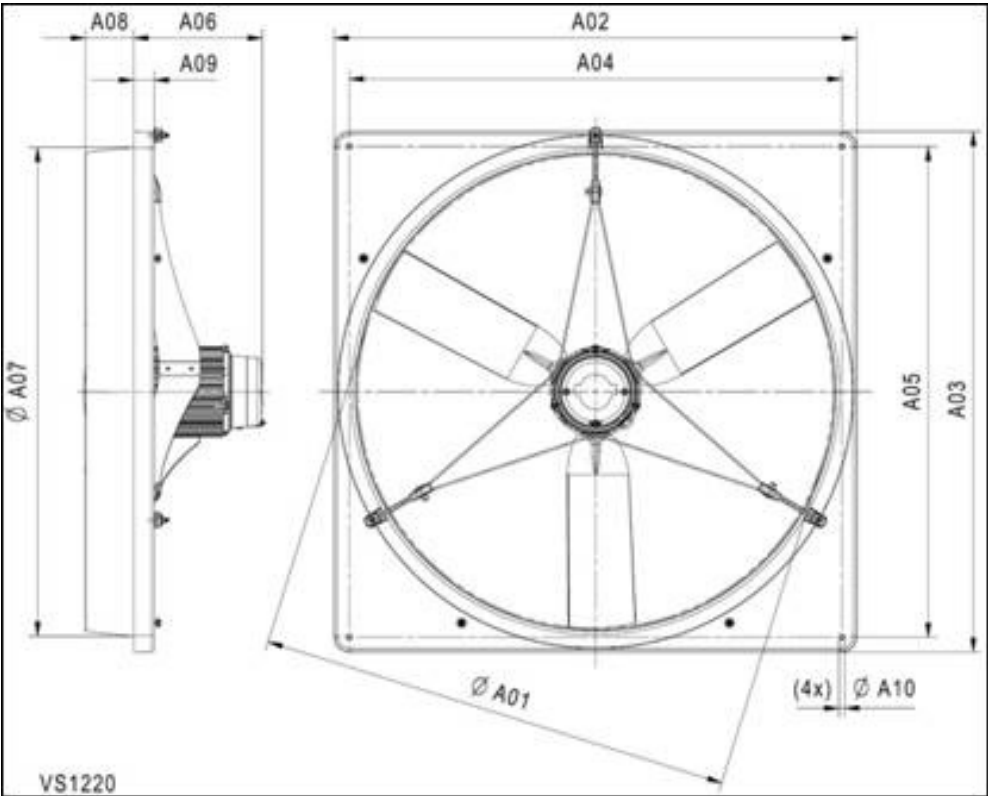

A01:	915 mm
A02:	1005 mm
A03:	1005 mm
A04:	947 mm
A05:	947 mm
A06:	247 mm
A07:	940 mm
A08:	93 mm
A09:	40 mm
A10:	10 mm



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com