

Technical data

Voltage	U	115	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1700	RPM
Power consumption	P _e	260	W
Nominal current	I _{nom}	2.3	A
Maximum current	I _{max}	3.2	A
Cos φ		0.98	
Capacitor		14/250	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	67	db(A)
Sound pressure level (23 ft)	L _p (calc.)	56	db(A)
Weight		29.5	Lbs.
Packing dimensions		25.0x25.0x14.2	inch

Fan details


Impeller blades	3
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	3300 CFM
-------------	----------




Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

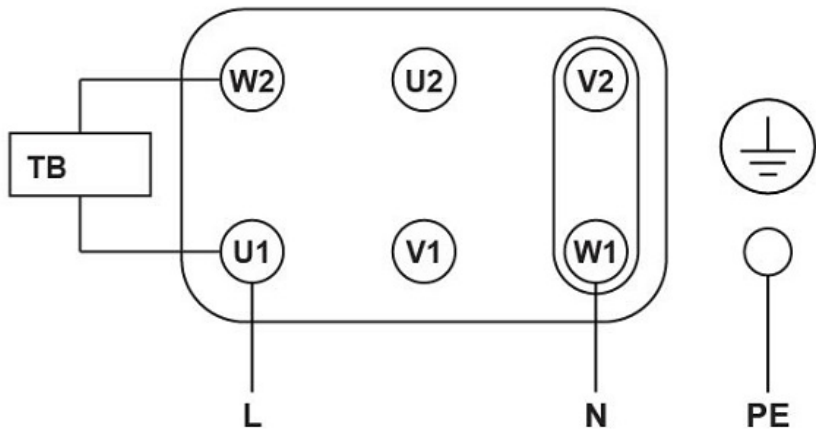

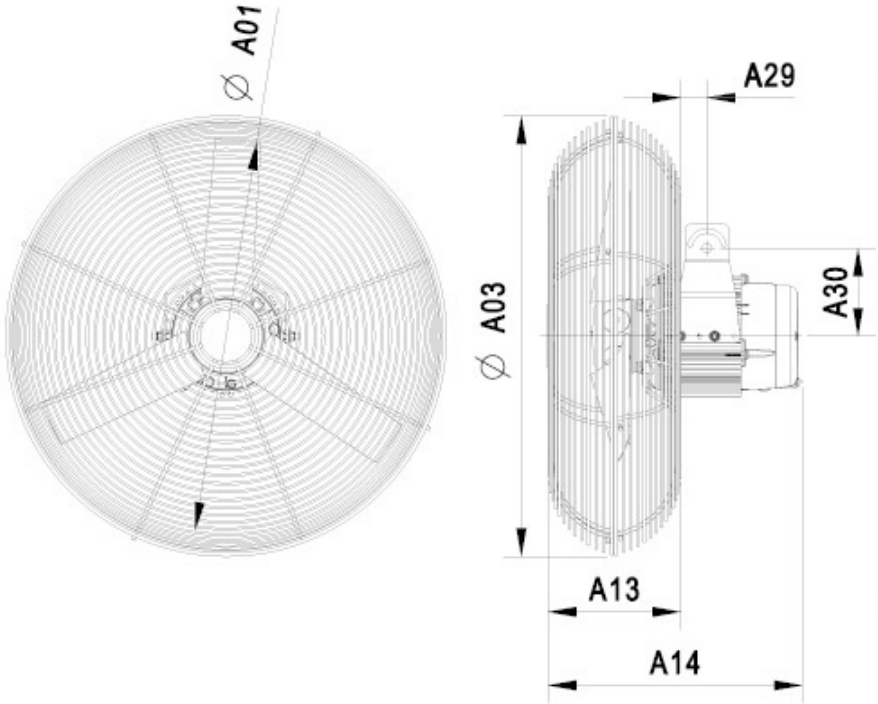Dimensions			
		A01:	20.2 inch
		A03:	22.6 inch
		A13:	6.9 inch
		A14:	13.1 inch
		A29:	1.3 inch
		A30:	4.5 inch

