



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	610	RPM
Power consumption	P _e	1400	W
Nominal current	I _{nom}	5.1/2.9	A
Maximum current	I _{max}	5.9/3.4	A
Cos φ		0.68	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	69	db(A)
Sound pressure level (7 m)	L _p (calc.)	58	db(A)
Weight		79.8	kg


Fan details

Impeller blades	6
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

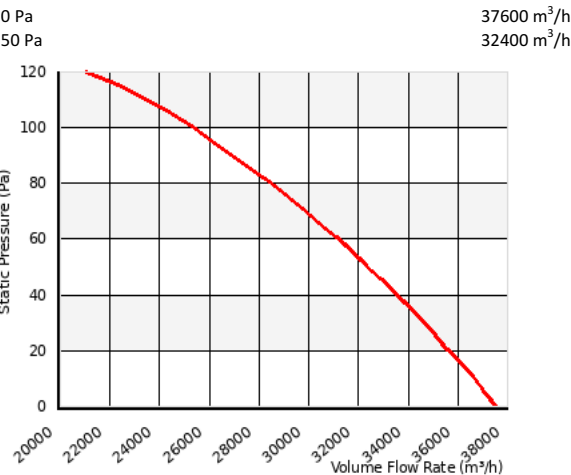


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram

C11 - 3 Phase - Y connection - CCW

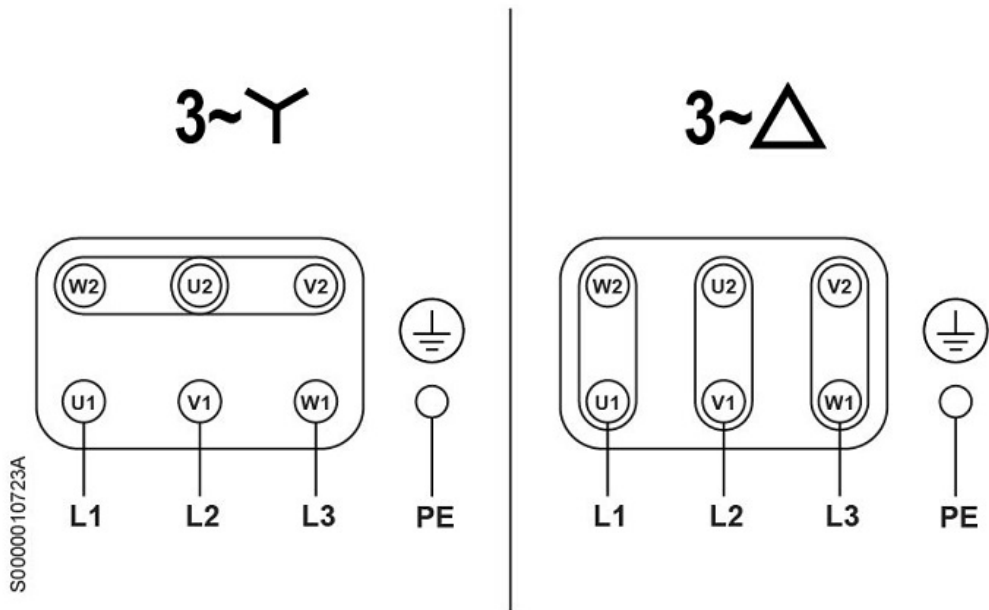

Dimensions

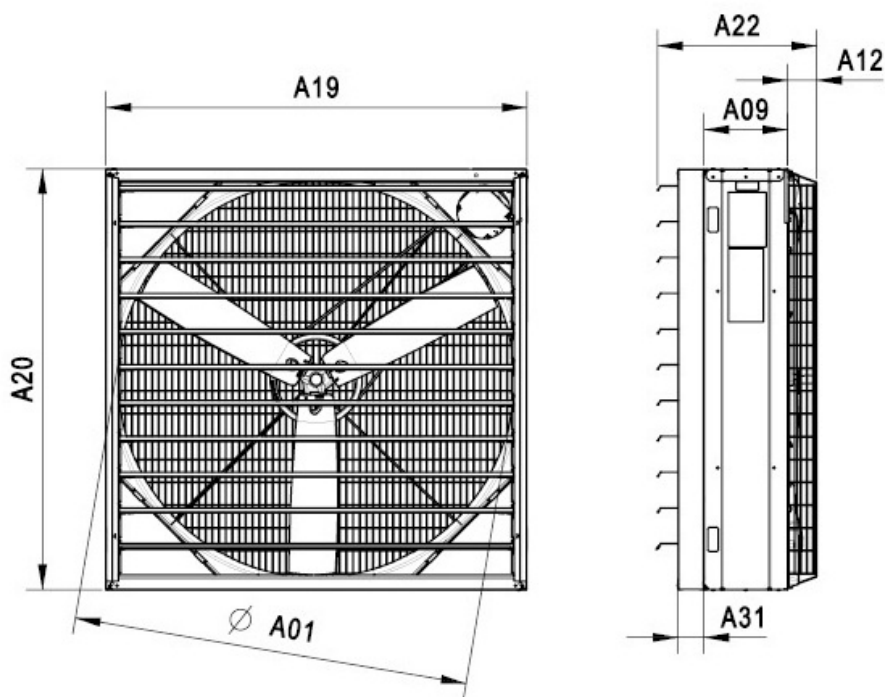

A01:	1284 mm
A09:	275 mm
A12:	96 mm
A19:	1382 mm
A20:	1382 mm
A22:	523 mm
A31:	85 mm