



Technical data

Voltage	U	240	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1550	RPM
Power consumption	P _e	420	W
Nominal current	I _{nom}	1.8	A
Maximum current	I _{max}	2.0	A
Cos φ		0.99	
Capacitor		20/250	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		1.7	kg

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 8100 m³/h
50 Pa 6650 m³/h

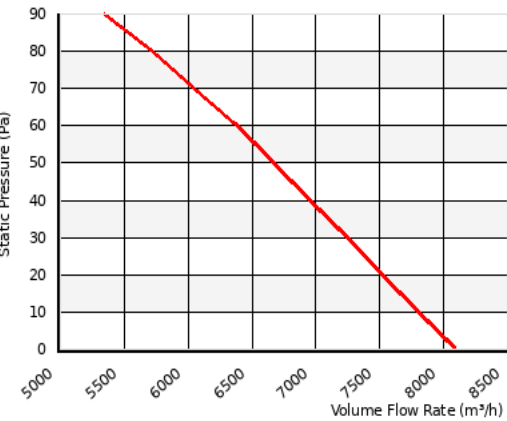



Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C3 - 1 Phase - Dual High Voltage - CCW

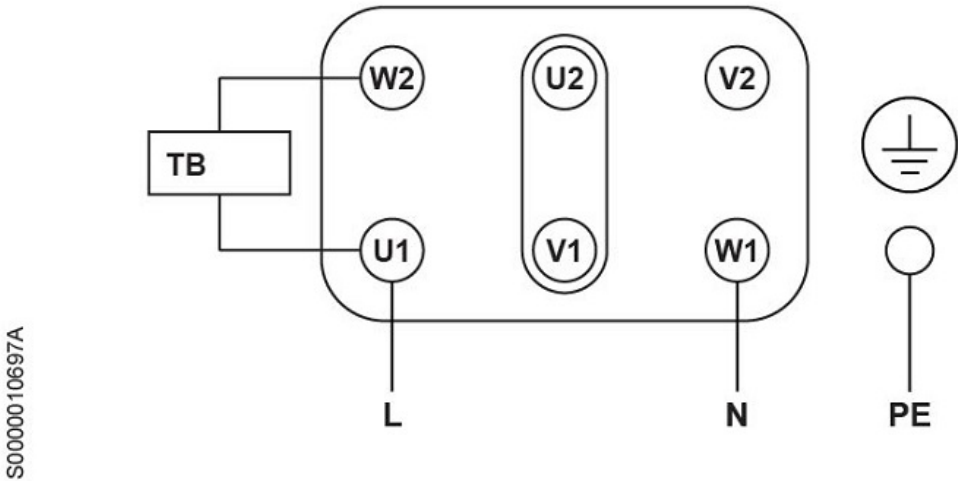

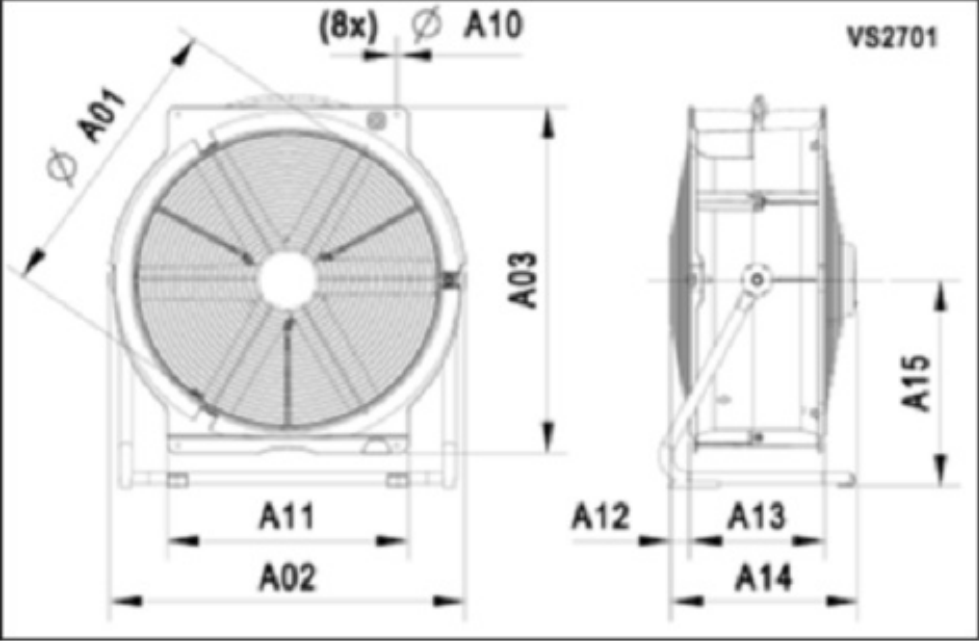Dimensions	
	A01:
	A02:
	A03:
	A10:
	A11:
	A12:
	A13:
	A14:
	A15:

A01:	518 mm
A02:	620 mm
A03:	620 mm
A10:	6.5 mm
A11:	420 mm
A12:	33 mm
A13:	236 mm
A14:	327 mm
A15:	369 mm

