

Technical data

Voltage	U	120	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1675	RPM
Power consumption	P _e	265	W
Nominal current	I _{nom}	2.4	A
Maximum current	I _{max}	2.9	A
Cos φ		0.96	
Capacitor		25/250	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		31.8	Lbs.
Packing dimensions		25.0x25.0x14.2	inch

Fan details


Impeller blades	3
Impeller type	3
Impeller system	C
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	4370 CFM
-------------	----------




Please note: Picture may deviate from original product


Approval(s)



No.c16086

Wiring diagram
C1 - 1 Phase - Standard - CCW

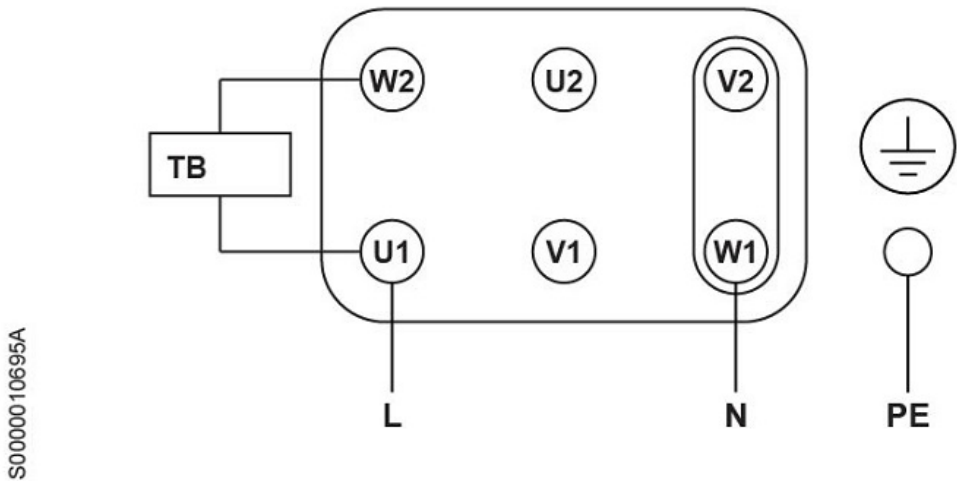

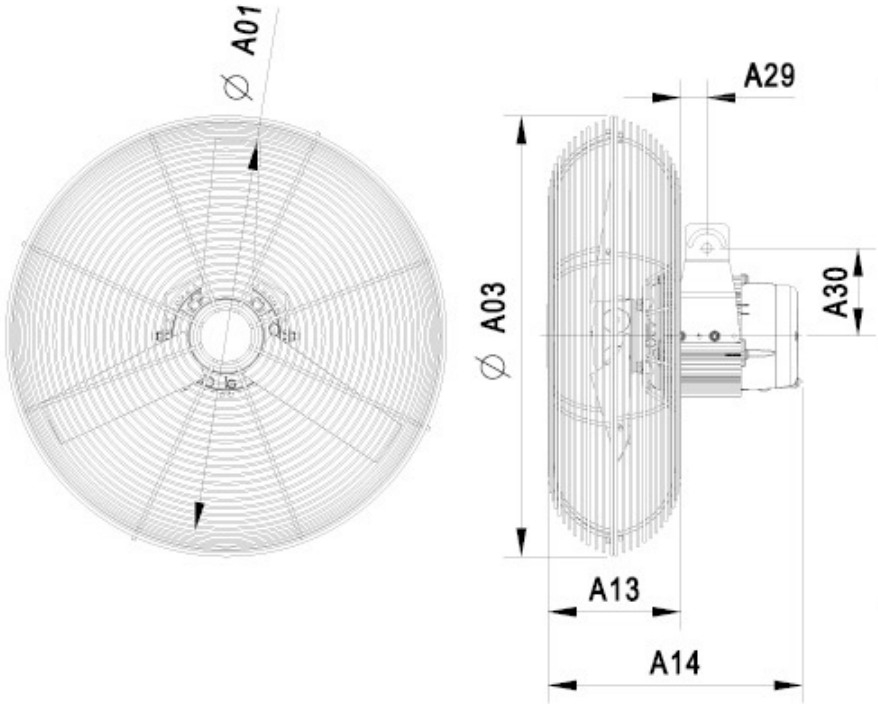Dimensions			
		A01:	20.2 inch
		A03:	22.6 inch
		A13:	6.9 inch
		A14:	13.1 inch
		A29:	1.3 inch
		A30:	4.5 inch

