



Technical data

Voltage	U	240/420	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1120	RPM
Power consumption	P _e	490	W
Nominal current	I _{nom}	2/1.2	A
Maximum current	I _{max}	2.1/1.2	A
Cos φ		0.6	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		100.6	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details



Impeller blades	4
Impeller type	4
Impeller system	K
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg 8180 CFM
0.20 in. wg 6590 CFM

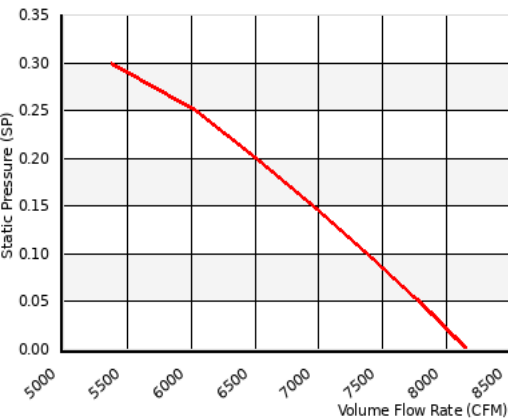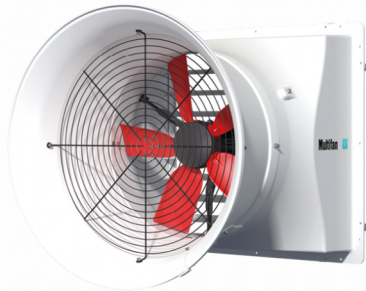

Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW



