



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1730	RPM
Power consumption	P _e	120	W
Nominal current	I _{nom}	0.5/0.3	A
Maximum current	I _{max}	0.7/0.4	A
Cos φ		0.59	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	61	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	50	dB(A)
Weight		25.1	Lbs.
Packing dimensions		18.1x18.1x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	1470 CFM
0.20 in. wg	1270 CFM

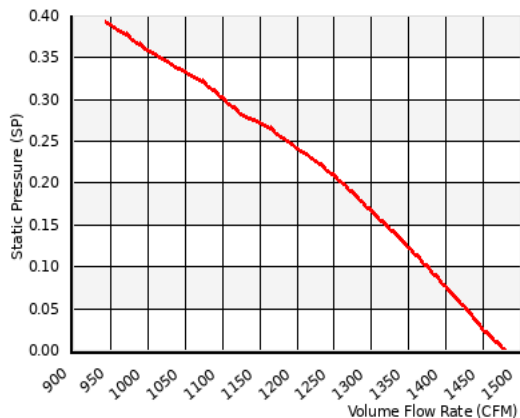


Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

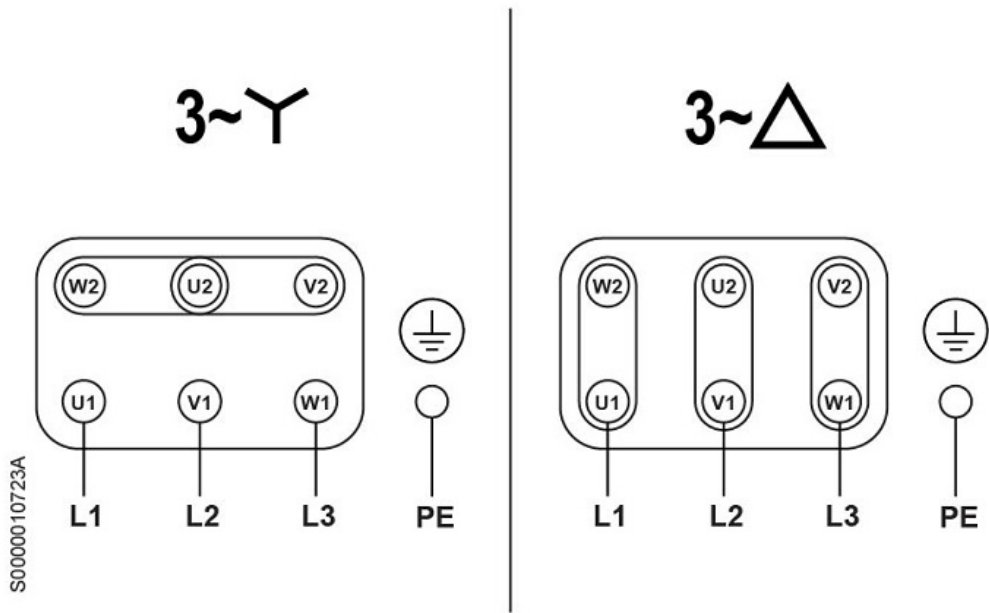

Dimensions

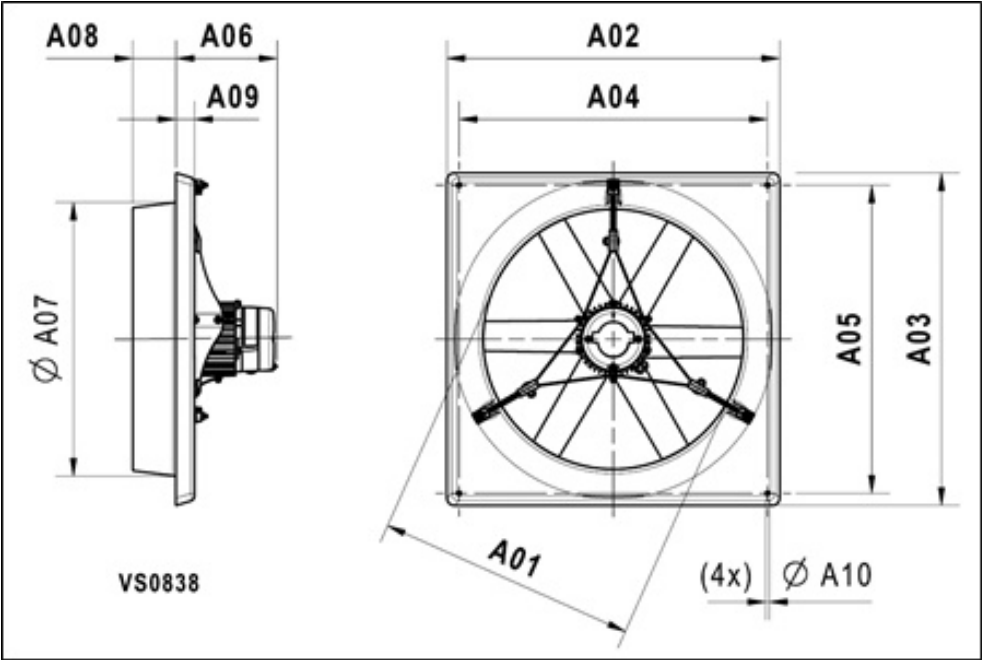

A01:	12.3 inch
A02:	17.4 inch
A03:	17.4 inch
A04:	15.6 inch
A05:	15.6 inch
A06:	7.6 inch
A07:	13.4 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch

