



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	975	RPM
Power consumption	P _e	1000	W
Nominal current	I _{nom}	5/2.9	A
Maximum current	I _{max}	5.1/3.0	A
Cos φ		0.51	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	73	db(A)
Sound pressure level (23 ft)	L _p (calc.)	62	db(A)
Weight		65.5	Lbs.

Fan details


Impeller blades	8
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 9180 CFM
0.40 in. wg 7420 CFM

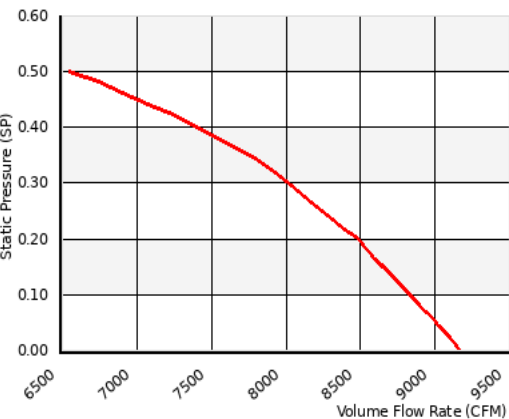

Please note: Picture may deviate from original product

Approval(s)

Motor approval
cULus



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions	
	A01: 25.2 inch
	A03: 34.1 inch
	A07: 28.1 inch
	A08: 8.3 inch
	A10: 0.4 inch
	A14: 16.1 inch

