



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1735	RPM
Power consumption	P _e	170	W
Nominal current	I _{nom}	0.7/0.4	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.56	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	64	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	53	dB(A)
Weight		9.8	kg
Packing dimensions		510x510x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

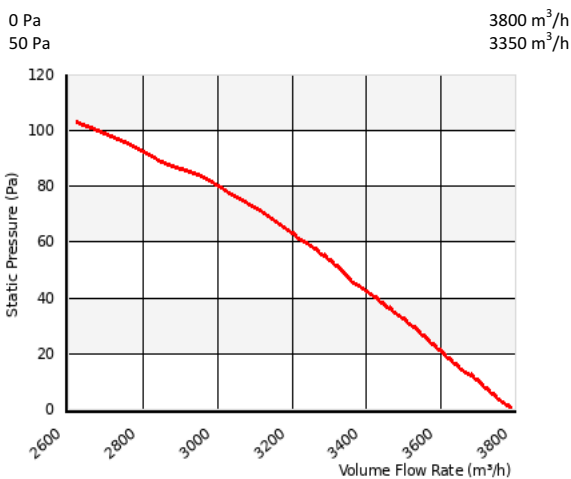


Please note: Picture may deviate from original product


Approval(s)

Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

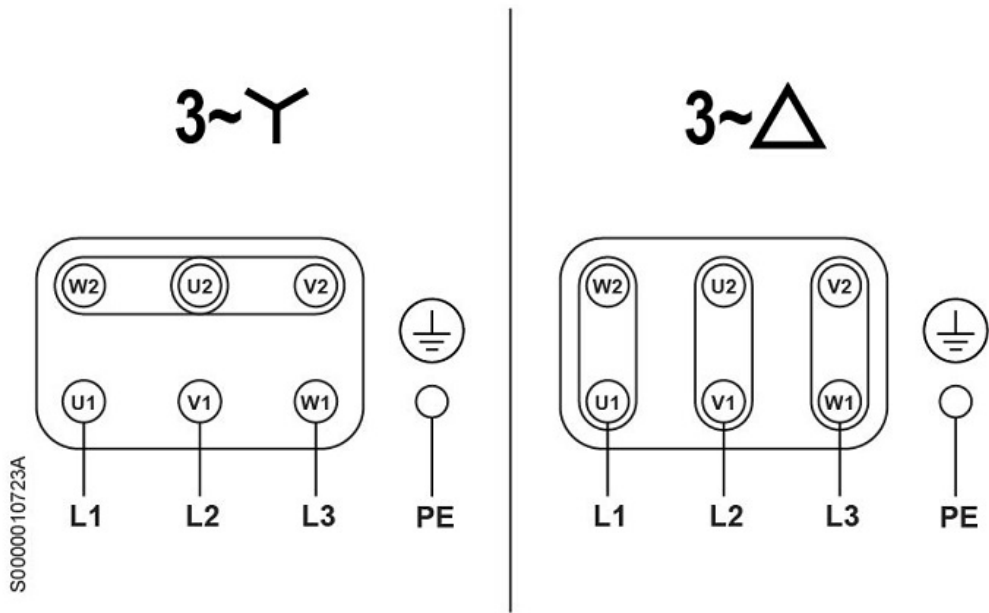

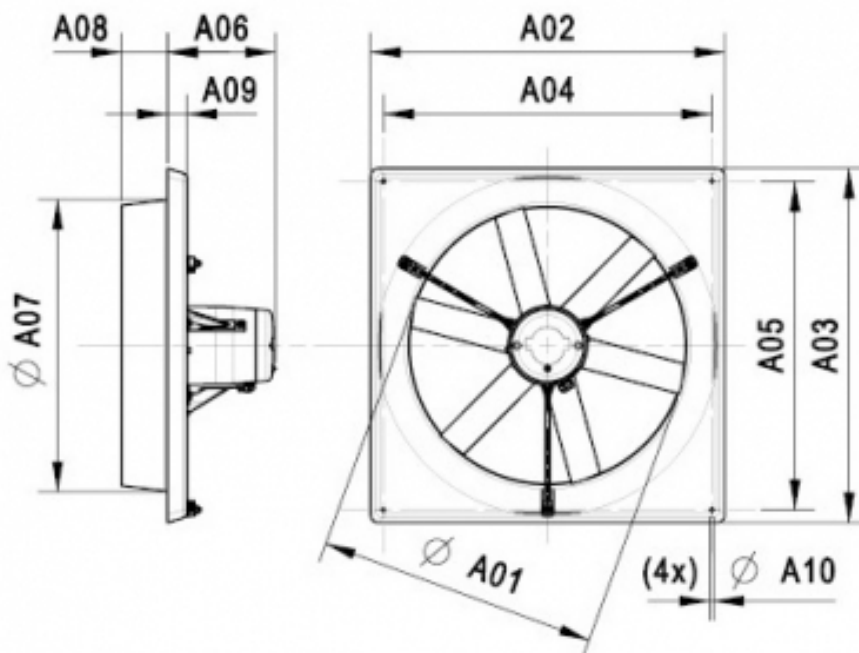Dimensions	
	A01: 362 mm
	A02: 492.5 mm
	A03: 492.5 mm
	A04: 445 mm
	A05: 445 mm
	A06: 192 mm
	A07: 390 mm
	A08: 84 mm
	A09: 36 mm
	A10: 7.5 mm

