

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1130	RPM
Power consumption	P _e	420	W
Nominal current	I _{nom}	1.9	A
Maximum current	I _{max}	3.2	A
Cos φ		0.97	
Capacitor		10/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		21.3	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 9350 m³/h
50 Pa 8100 m³/h

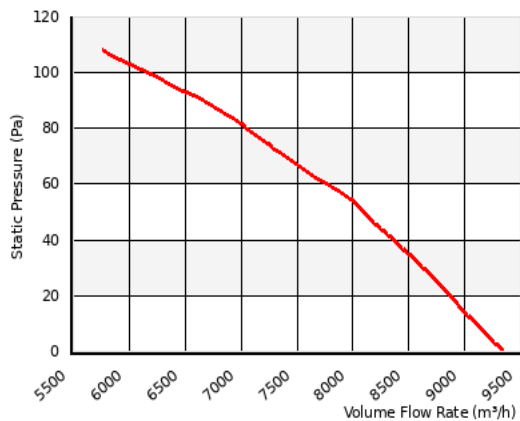


Please note: Picture may deviate from original product

Approval(s)

Motor approval



Wiring diagram

C1 - 1 Phase - Standard - CCW

S0000010695A

