



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1675	RPM
Power consumption	P _e	1400	W
Nominal current	I _{nom}	6.2	A
Maximum current	I _{max}	7.0	A
Cos φ		0.97	
Capacitor		26/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	

Fan details



Impeller blades	3
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg 10650 CFM
0.40 in. wg 8770 CFM

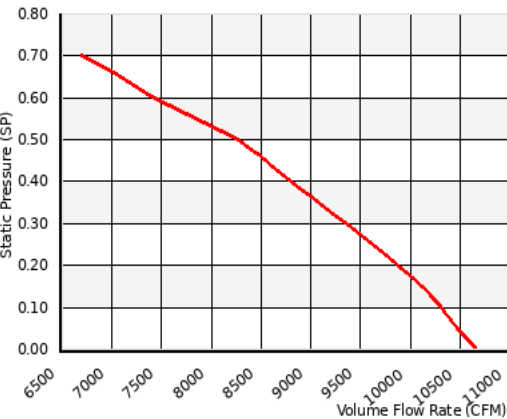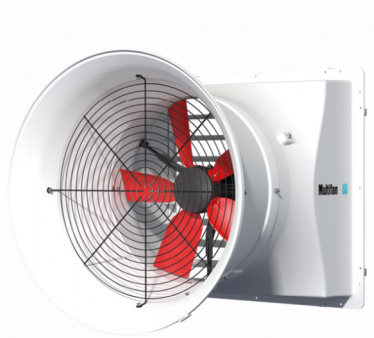


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

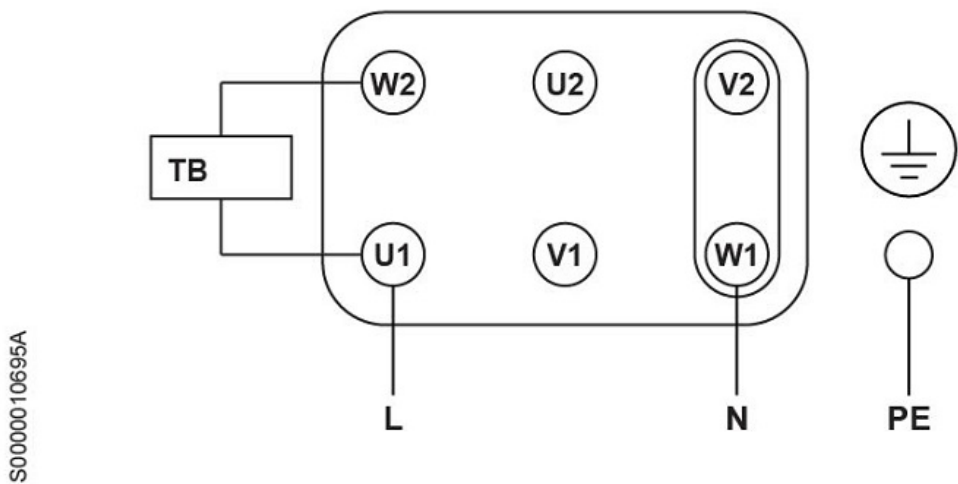

Dimensions

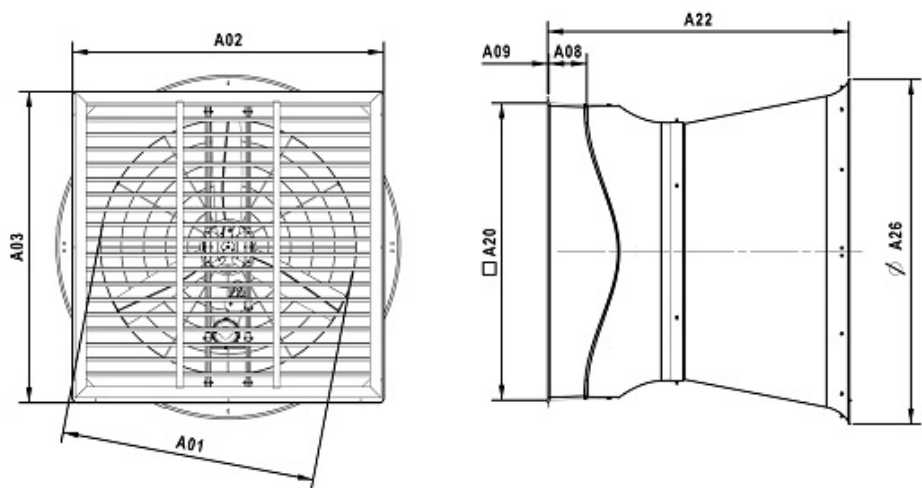

A01:	25.2 inch
A02:	34.6 inch
A03:	34.6 inch
A08:	8.0 inch
A09:	0.3 inch
A20:	31.0 inch
A22:	36.3 inch
A26:	35.9 inch