



Technical data

Voltage	U	254/440	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1115	RPM
Power consumption	P _e	275	W
Nominal current	I _{nom}	1.1/0.6	A
Maximum current	I _{max}	0.0	A
Cos φ		0	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	66	db(A)
Sound pressure level (7 m)	L _p (calc.)	55	db(A)
Weight		18.3	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	3
Impeller type	4
Impeller system	K
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa	10200 m ³ /h
------	-------------------------



Please note: Picture may deviate from original product


Approval(s)

Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

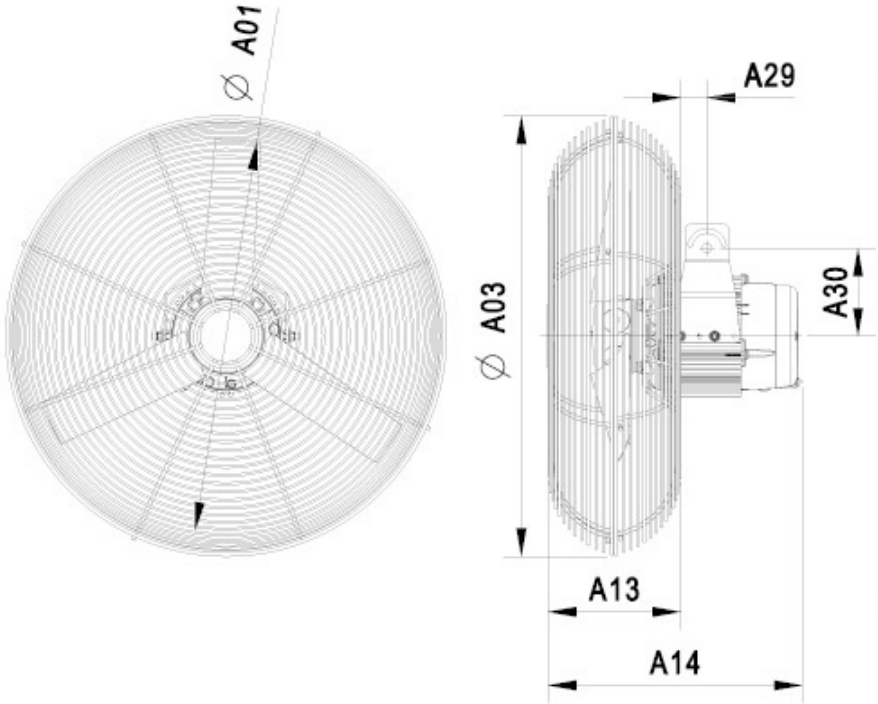

Dimensions			
		A01:	610 mm
		A03:	683 mm
		A13:	206 mm
		A14:	350 mm
		A29:	32 mm
		A30:	115 mm
			
VOSTERMANS VENTILATION			
Vostermans Ventilation B.V. Venlo - The Netherlands +31 (0)77 389 32 32 ventilation@vostermans.com		Vostermans Ventilation Inc. Bloomington, IL - U.S.A. +1 309 827 9798 ventilation@vostermansusa.com	
		Vostermans Ventilation Ltd. Co. Shanghai - China +86 21 5290 2889/2899 ventilation@vostermanschina.com	
		Vostermans Ventilation Sdn. Bhd. Tmn Klang Jaya - Malaysia +60 (0)33324 3638 ventilation@vostermansasia.com	