

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	555	RPM
Power consumption	P _e	1550	W
Nominal current	I _{nom}	4.8/2.8	A
Maximum current	I _{max}	5.7/3.3	A
Cos φ		0.81	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	76	dB(A)
Sound pressure level (7 m)	L _p (calc.)	65	dB(A)

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics


0 Pa 59100 m³/h
50 Pa 47300 m³/h

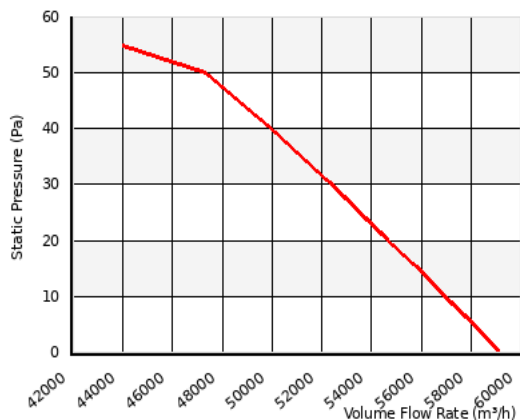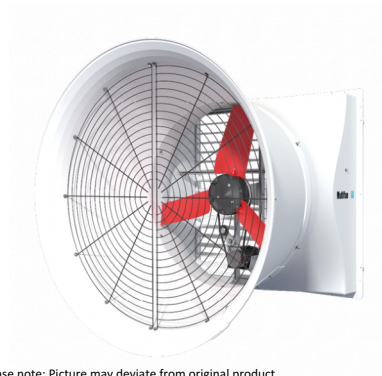


Please note: Picture may deviate from original product

Approval(s)

Wiring diagram
C11 - 3 Phase - Y connection - CW

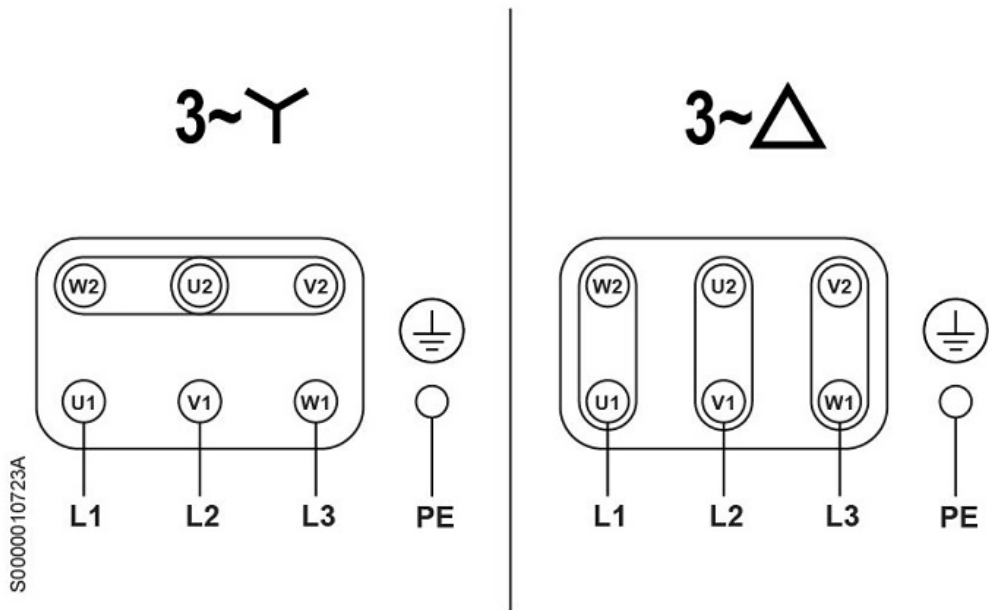

Dimensions

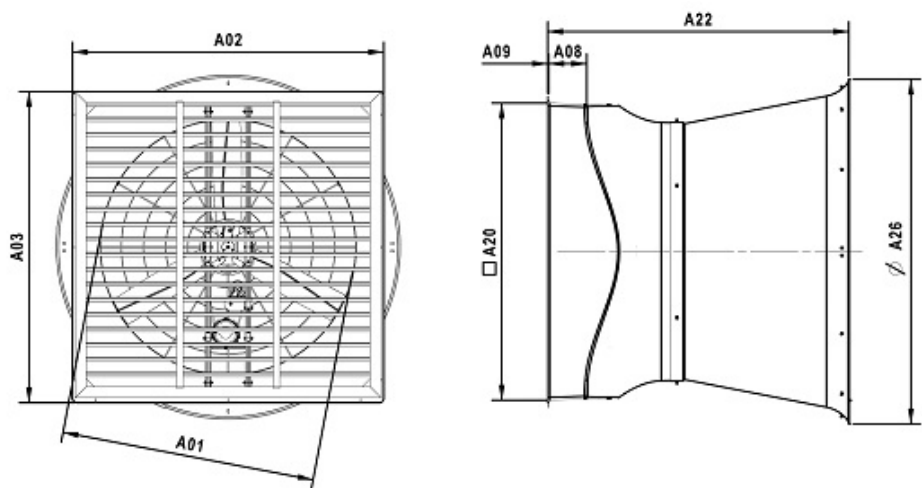

A01:	1369 mm
A02:	1710 mm
A03:	1710 mm
A08:	179 mm
A09:	10 mm
A20:	1621 mm
A22:	1650 mm
A26:	1874 mm