

**Technical data**

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	955	RPM
Power consumption	P _e	1650	W
Nominal current	I _{nom}	6.1/3.5	A
Maximum current	I _{max}	6.2/3.6	A
Cos φ		0.68	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	77	db(A)
Sound pressure level (23 ft)	L _p (calc.)	67	db(A)
Weight		71.1	Lbs.
Packing dimensions		3.3x39.4x39.4	inch

Fan details


Impeller blades	6
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	13100 CFM
0.40 in. wg	10700 CFM

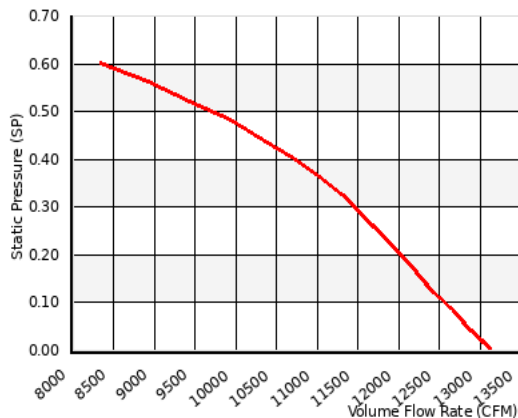


Please note: Picture may deviate from original product

Approval(s)
 Motor approval


Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

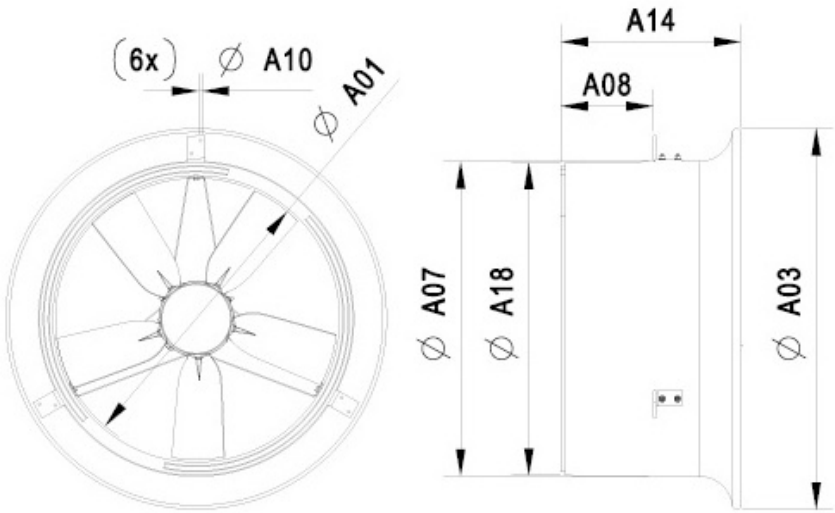

A01:	28.3 inch
A03:	38.4 inch
A07:	31.3 inch
A08:	8.3 inch
A10:	0.4 inch
A14:	20.1 inch

