

Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	415	RPM
Power consumption	P _e	650	W
Nominal current	I _{nom}	4.6	A
Maximum current	I _{max}	4.8	A
Cos φ		0.61	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	60	db(A)
Sound pressure level (23 ft)	L _p (calc.)	49	db(A)
Weight		276.7	Lbs.
Packing dimensions		68.5x33.5x74.0	inch

Fan details


Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	18300 CFM
0.12 in. wg	13000 CFM

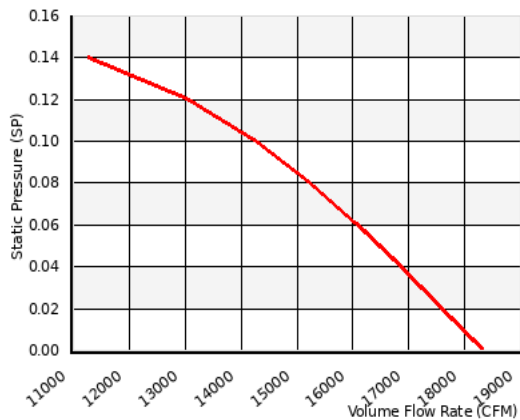


Please note: Picture may deviate from original product

Approval(s)



Dimensions

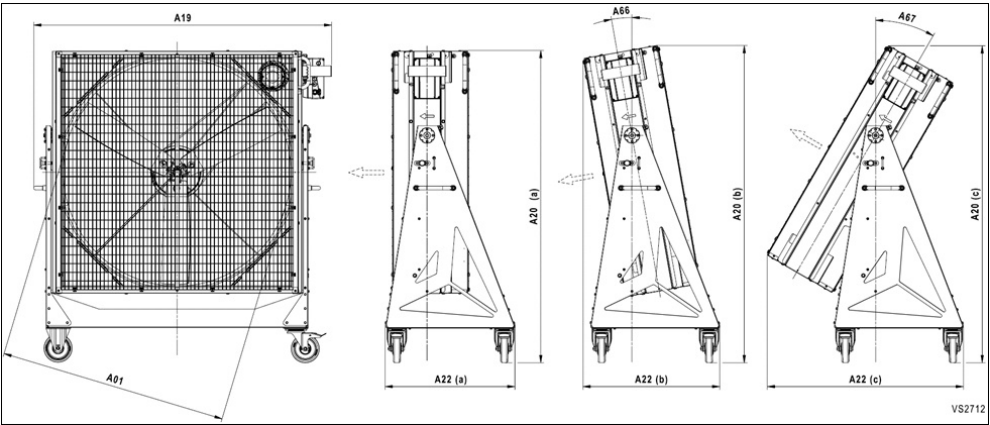

A01:	50.6 inch
A19:	65.8 inch
A20:	70.2 inch
A20 (b):	71.3 inch
A20 (c):	71.5 inch
A22:	29.2 inch
A22 (b):	30.8 inch
A22 (c):	38.1 inch
A66:	10°
A67:	18°