

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	835	RPM
Power consumption	P _e	640	W
Nominal current	I _{nom}	3.1	A
Maximum current	I _{max}	3.8	A
Cos φ		0.9	
Capacitor		14/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	69	dB(A)
Sound pressure level (7 m)	L _p (calc.)	58	dB(A)
Weight		30.4	kg
Packing dimensions		187.8x1000x1000	mm

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa	22150 m ³ /h
------	-------------------------



Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A




VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

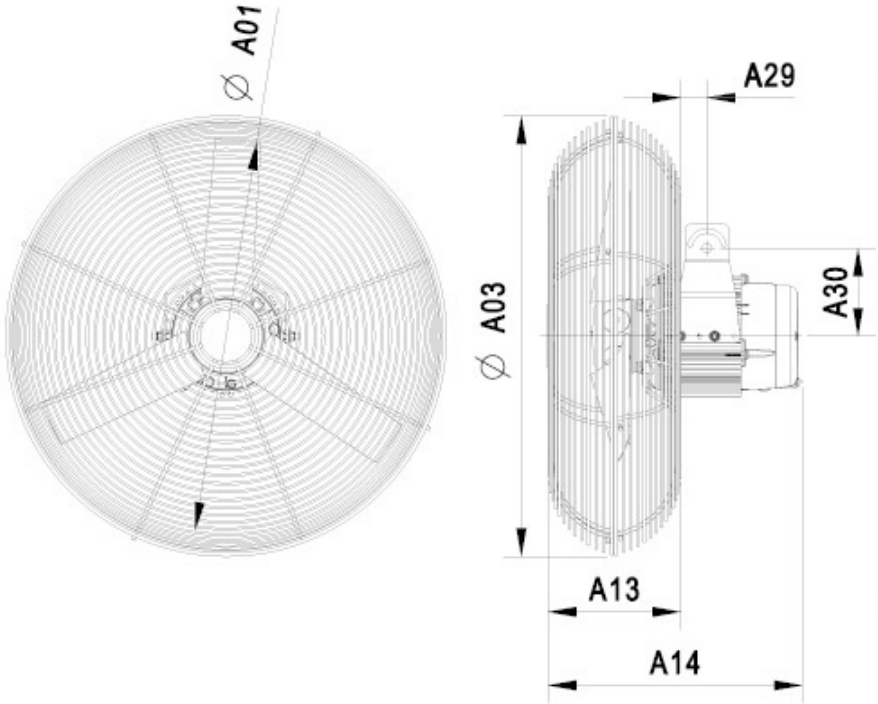Dimensions			
	A01:	905 mm	
	A03:	983 mm	
	A13:	254 mm	
	A14:	425 mm	
	A29:	29 mm	
	A30:	115 mm	
		VOSTERMANS VENTILATION	
Vostermans Ventilation B.V. Venlo - The Netherlands +31 (0)77 389 32 32 ventilation@vostermans.com		Vostermans Ventilation Inc. Bloomington, IL - U.S.A. +1 309 827 9798 ventilation@vostermansusa.com	
		Vostermans Ventilation Ltd. Co. Shanghai - China +86 21 5290 2889/2899 ventilation@vostermanschina.com	
		Vostermans Ventilation Sdn. Bhd. Tmn Klang Jaya - Malaysia +60 (0)33324 3638 ventilation@vostermansasia.com	