

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	770	RPM
Power consumption	P _e	680	W
Nominal current	I _{nom}	3.3	A
Maximum current	I _{max}	3.4	A
Cos φ		0.9	
Capacitor		12/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		89.6	Lbs.
Packing dimensions		43.3x7.5x5.9	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	10050 CFM
0.20 in. wg	6590 CFM

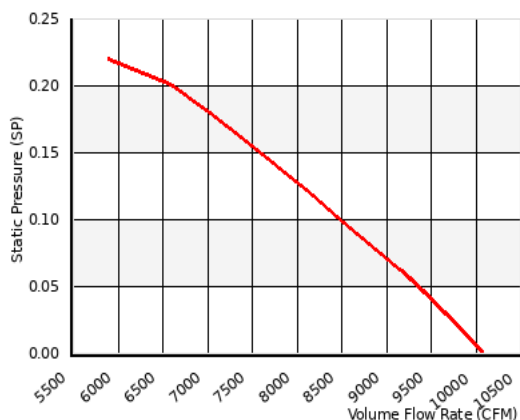

Please note: Picture may deviate from original product

Approval(s)


Motor approval
CE **UL** **US**



No.16245

Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

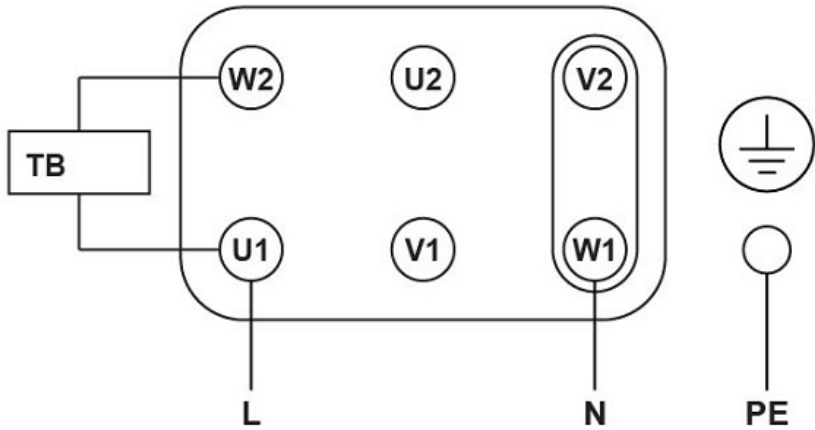

VOSTERMANS
VENTILATION


Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Dimensions

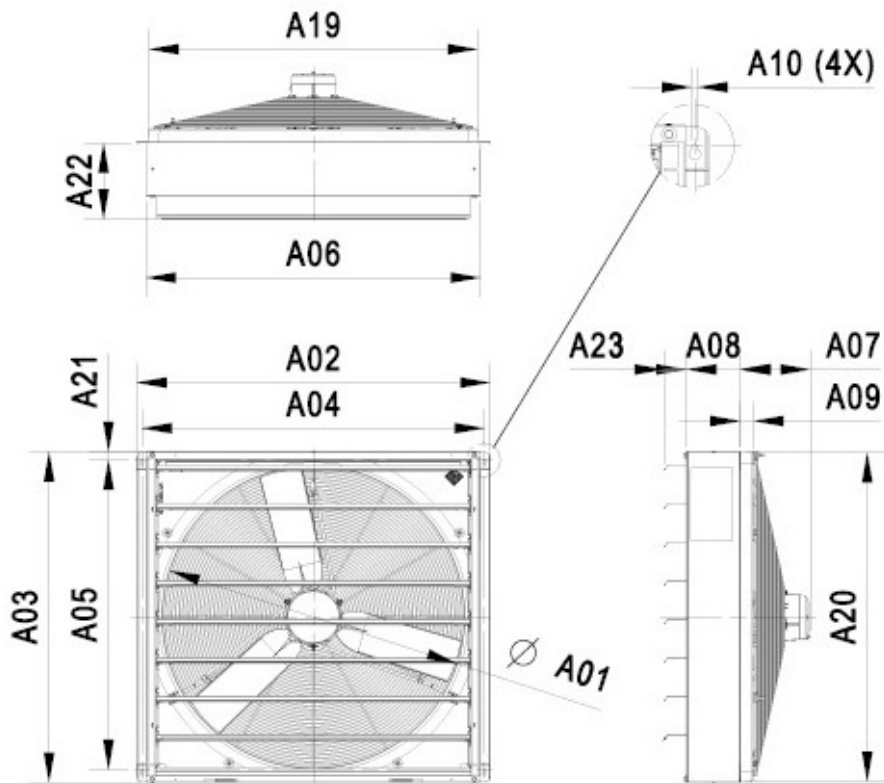

A01:	36.0 inch
A02:	42.5 inch
A03:	39.9 inch
A04:	41.2 inch
A05:	37.3 inch
A06:	40.2 inch
A07:	8.7 inch
A08:	6.5 inch
A09:	1.6 inch
A10:	0.3 inch
A19:	39.6 inch
A20:	39.6 inch
A21:	1.0 inch
A22:	9.2 inch
A23:	2.8 inch



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com