



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	895	RPM
Power consumption	P _e	740	W
Nominal current	I _{nom}	2.7/1.6	A
Maximum current	I _{max}	3.0/1.8	A
Cos φ		0.68	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	78	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	67	dB(A)
Weight		61.4	kg

Fan details



Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 21800 m³/h
50 Pa 16900 m³/h

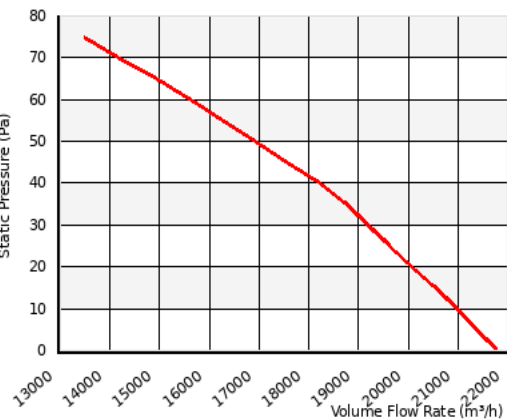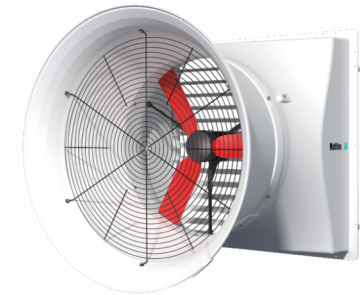


Please note: Picture may deviate from original product



No.13648





Wiring diagram
C11 - 3 Phase - Y connection - CCW

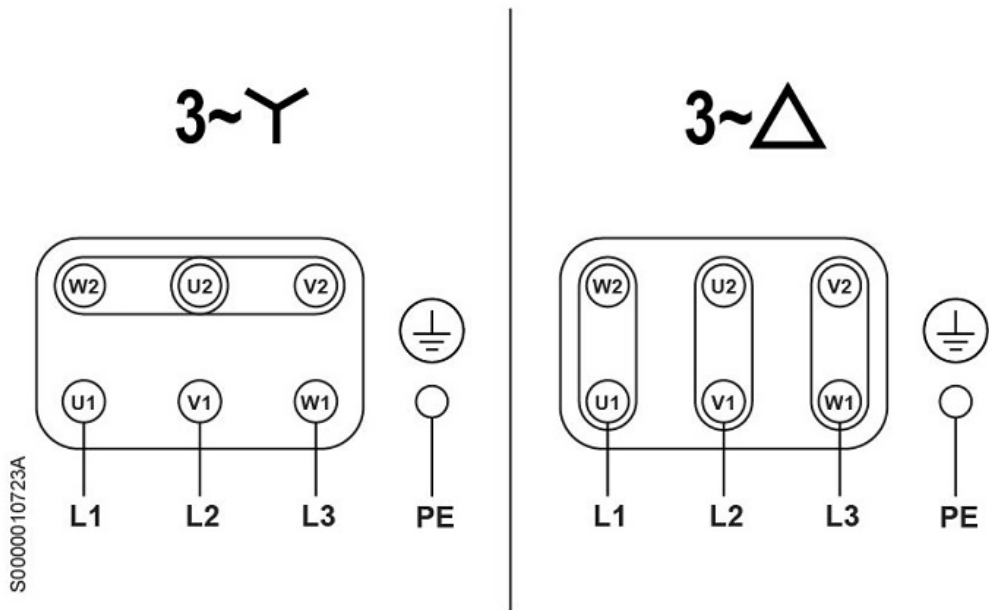

Article number: C6D92A0M10241

FC fans - High efficient

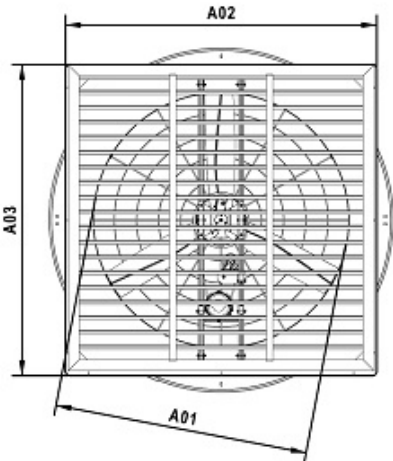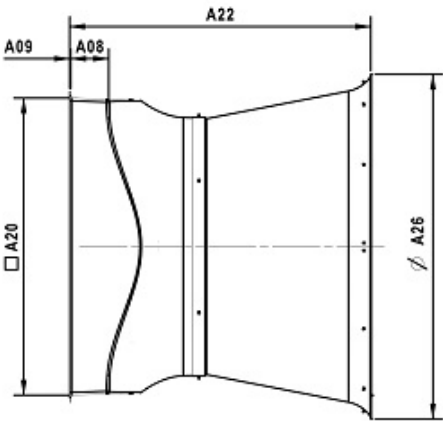Dimensions			
		A01:	913 mm
		A02:	1246 mm
		A03:	1246 mm
		A08:	182 mm
		A09:	8 mm
		A20:	1153 mm
		A22:	1236 mm
		A26:	1286 mm