



Technical data


Voltage	U	400-480	V
Phase		3	~
Frequency	f	50/60	Hz
Speed	n	1000	RPM
Power consumption	P _e	1100	W
Nominal current	I _{nom}	1.9	A
Maximum current	I _{max}	2.1	A
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CLF	
IP Class Fan		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	74	db(A)
Sound pressure level (23 ft)	L _p (calc.)	63	db(A)
Weight		74.2	Lbs.

Fan details

Impeller blades	8
Impeller type	5
Impeller system	G
Impeller material	PG

Characteristics

0.00 in. wg 9480 CFM
0.40 in. wg 7830 CFM

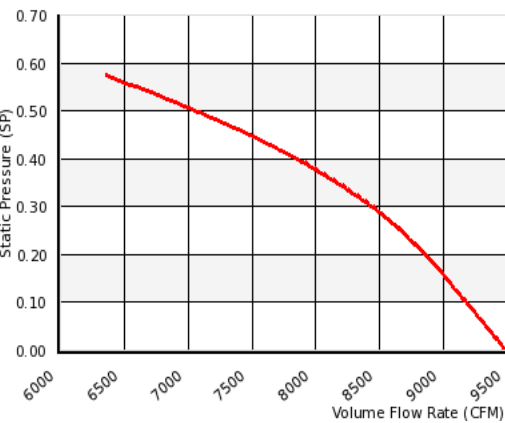


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

BR01 - 3 Phase ECplus controller --

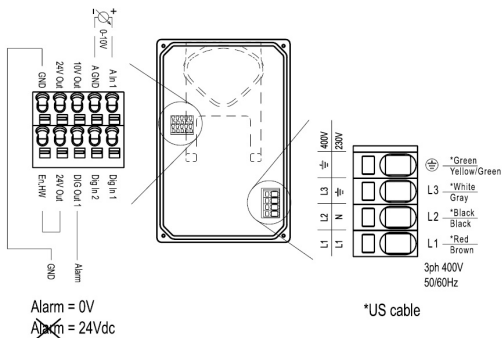

Dimensions

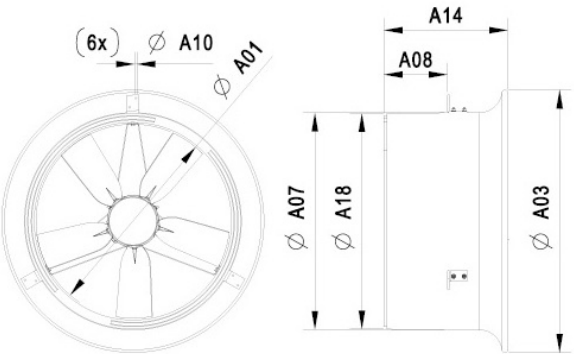

A01:	25.2 inch
A03:	34.1 inch
A07:	28.2 inch
A08:	8.3 inch
A10:	0.4 inch
A14:	16.1 inch

