



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	940	RPM
Power consumption	P _e	110	W
Nominal current	I _{nom}	0.5/0.3	A
Maximum current	I _{max}	0.6/0.4	A
Cos φ		0.5	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	58	dB(A)
Sound pressure level (7 m)	L _p (calc.)	47	dB(A)
Weight		12.1	kg
Packing dimensions		600x600x400	mm


Fan details

Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

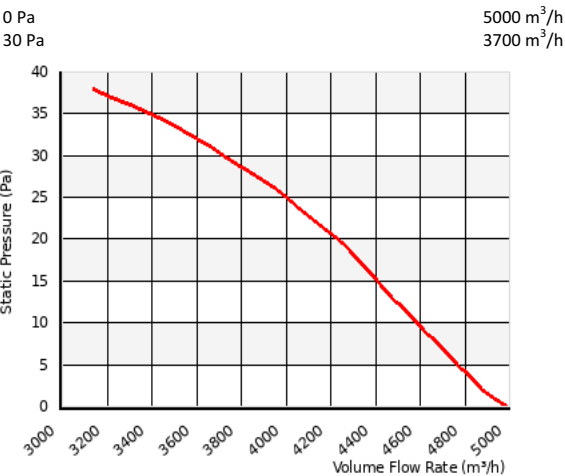


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

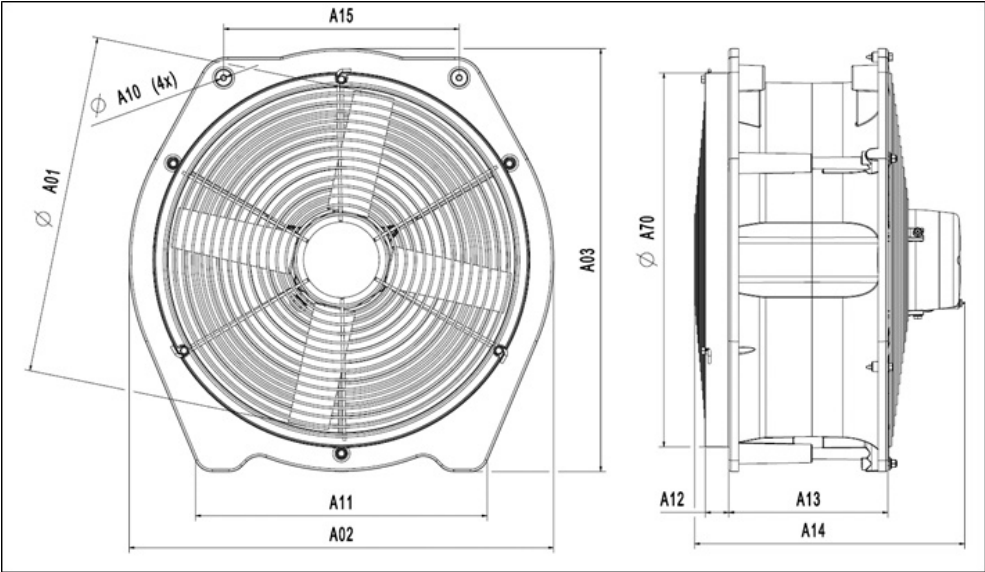

Dimensions	
	A01: 472 mm
	A02: 587 mm
	A10: 6.5 mm
	A11: 403 mm
	A12: 33 mm
	A13: 220 mm
	A14: 374 mm
	A15: 326 mm
	A70: 520 mm