



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1700	RPM
Power consumption	P _e	240	W
Nominal current	I _{nom}	0.9/0.5	A
Maximum current	I _{max}	1.1/0.7	A
Cos φ		0.67	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	68	dB(A)
Sound pressure level (7 m)	L _p (calc.)	57	dB(A)
Weight		13.3	kg
Packing dimensions		560x560x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

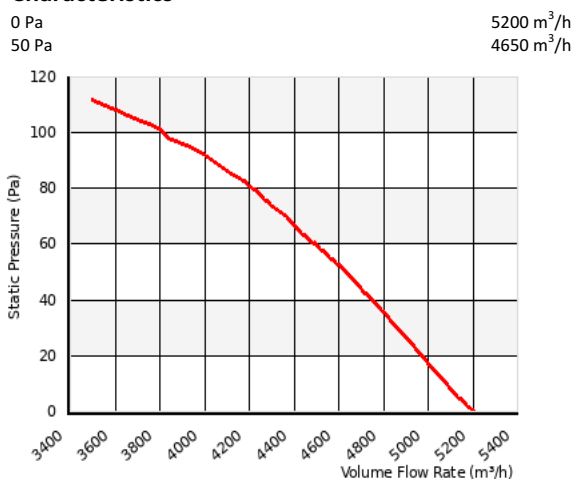

Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

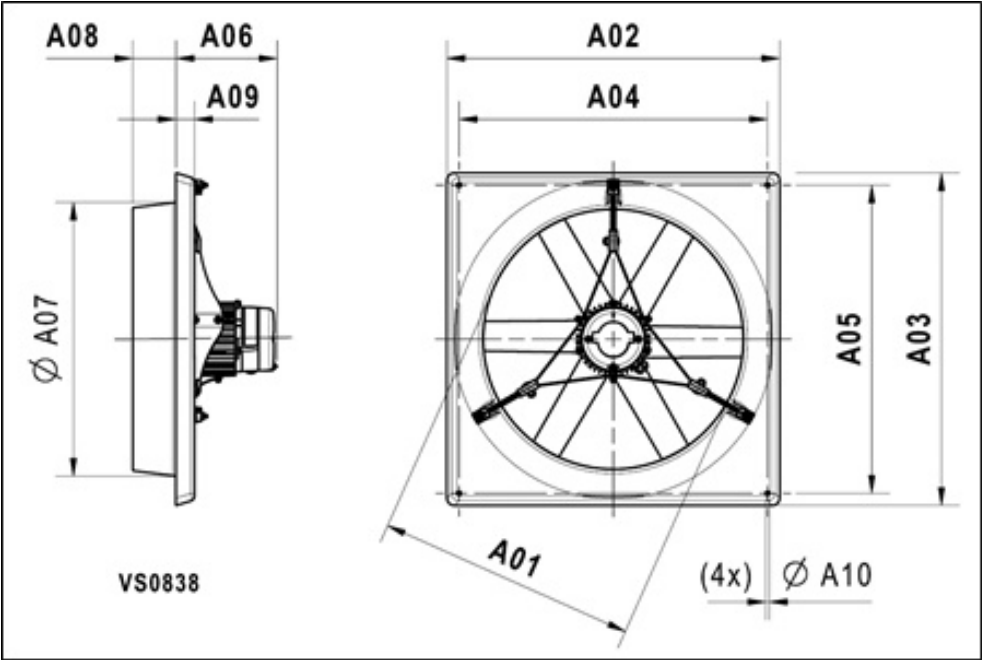

A01:	415 mm
A02:	542.5 mm
A03:	542.5 mm
A04:	495 mm
A05:	495 mm
A06:	192 mm
A07:	440 mm
A08:	84 mm
A09:	36 mm
A10:	7.5 mm

