



Technical data

Voltage	U	120	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1500	RPM
Power consumption	P _e	460	W
Nominal current	I _{nom}	3.9	A
Maximum current	I _{max}	4.4	A
Cos φ		0.97	
Capacitor		20/250	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	77	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	66	dB(A)
Weight		0.4	Lbs.

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg 4620 CFM
0.20 in. wg 3680 CFM

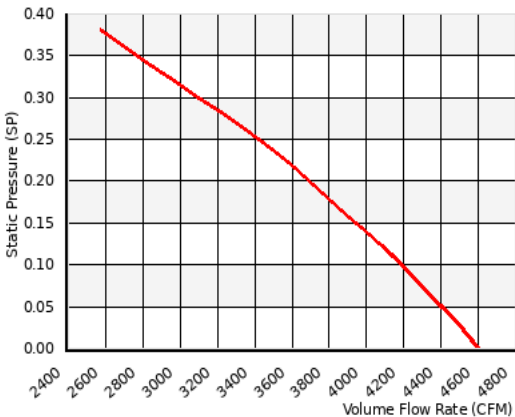

Please note: Picture may deviate from original product


Approval(s)


Motor approval
cULus



Wiring diagram
C2 - 1 Phase - Dual Low voltage - CCW

S0000010696A

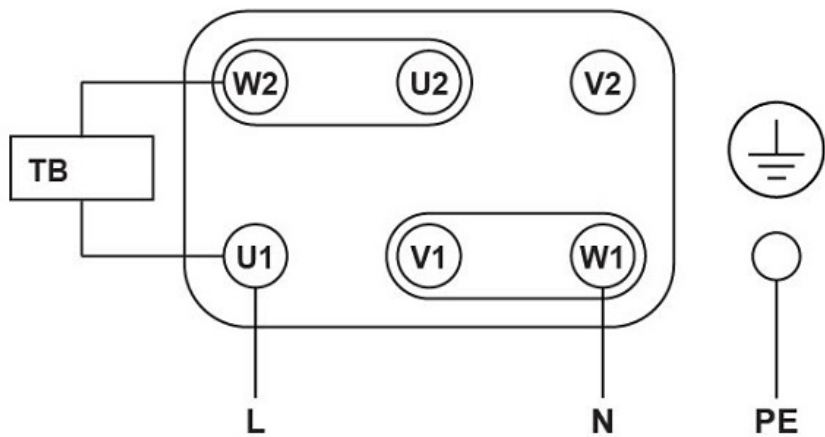

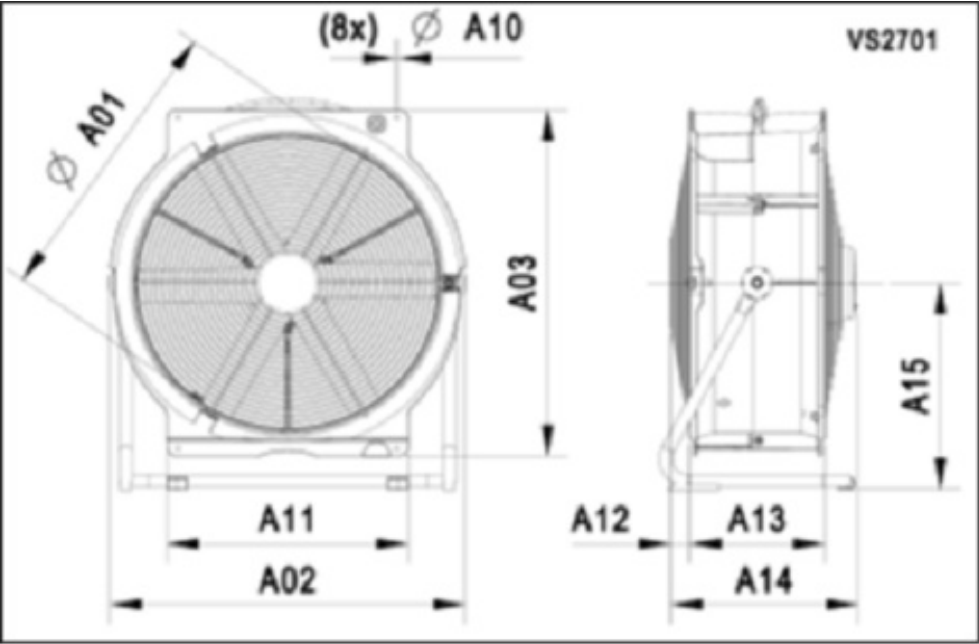Dimensions				
				
A01:	20.4	inch		
A02:	24.4	inch		
A03:	24.4	inch		
A10:	0.3	inch		
A11:	16.5	inch		
A12:	1.3	inch		
A13:	9.3	inch		
A14:	12.9	inch		
A15:	14.5	inch		

