Article number: P6D92AAM11100

Tube mounting fans

Multifan

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	945	RPM
Power consumption	P_e	760	W
Nominal current	I_{nom}	2.7/1.6	A
Maximum current	I_{max}	3.0/1.7	A
Cos ϕ		0.71	
Capacitor		-	µF/V
Ambient temperature	$T_{amb\ min/max}$	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	$L_{p\ (meas.)}$	77	dB(A)
Sound pressure level (23 ft)	$L_{p\ (calc.)}$	66	dB(A)
Weight		41.9	Lbs.
Packing dimensions		9.7x39.4x39.4	inch

Fan details

Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	12400 CFM
0.20 in. wg	10550 CFM

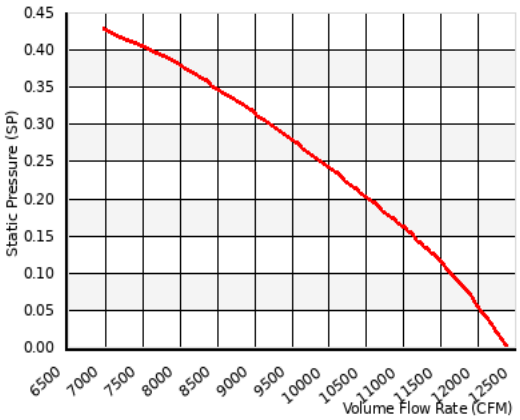

Please note: Picture may deviate from original product

VOSTERMANS VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Version 3.0 18Jul2026

Article number: P6D92AAM11100

Tube mounting fans

Wiring diagram

C11 - 3 Phase - Y connection - CCW

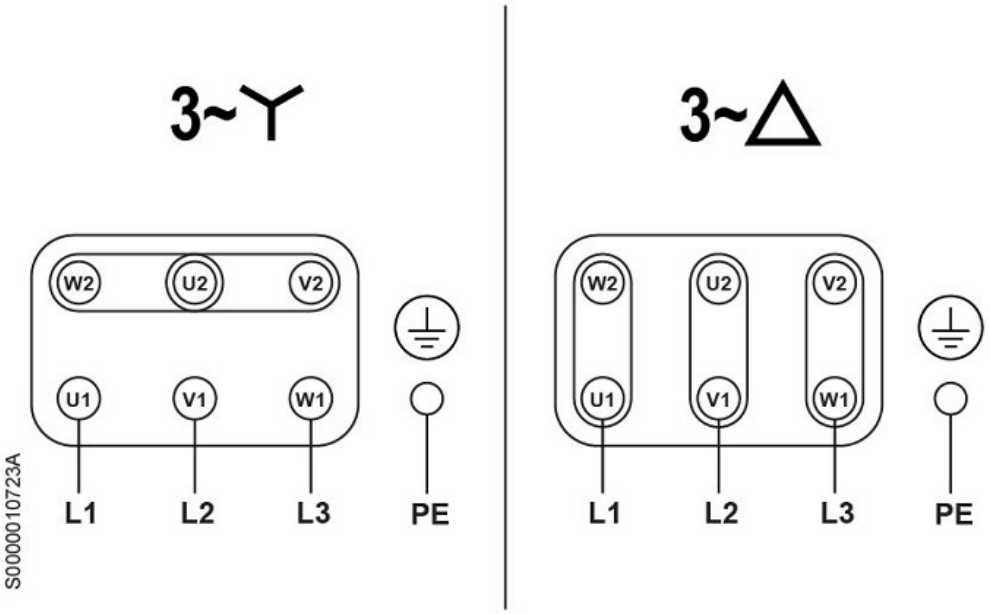

Article number: P6D92AAM11100

Tube mounting fans

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com