

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	915	RPM
Power consumption	P _e	490	W
Nominal current	I _{nom}	2.3/1.3	A
Maximum current	I _{max}	2.9/1.7	A
Cos φ		0.57	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		56.0	Lbs.
Packing dimensions		32.5x32.5x15.6	inch

Fan details


Impeller blades	3
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	8120 CFM
-------------	----------




Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW

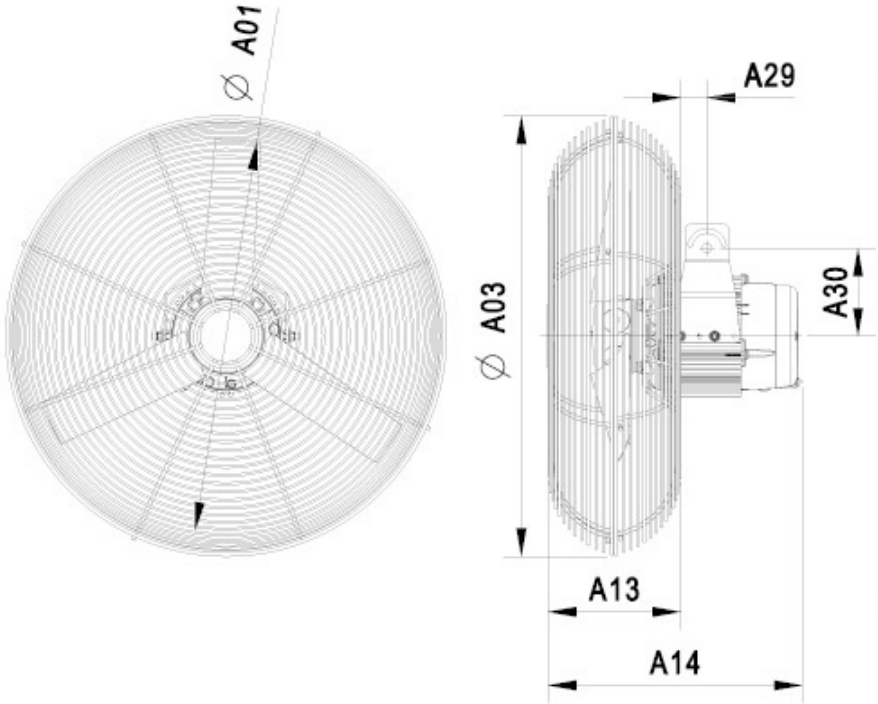

Dimensions			
		A01:	27.9 inch
		A03:	32.7 inch
		A13:	9.1 inch
		A14:	16.3 inch
		A29:	1.1 inch
		A30:	4.5 inch

