



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1695	RPM
Power consumption	P _e	130	W
Nominal current	I _{nom}	0.6	A
Maximum current	I _{max}	0.7	A
Cos φ		0.99	
Capacitor		03/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	61	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	50	dB(A)
Weight		25.2	Lbs.
Packing dimensions		18.1x18.1x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg	1410 CFM
0.20 in. wg	1180 CFM

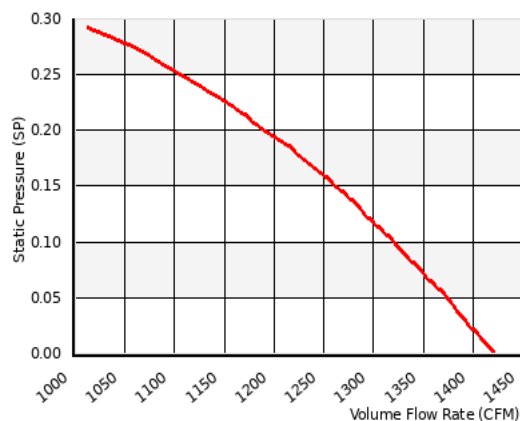

Please note: Picture may deviate from original product

Approval(s)

Motor approval
CE **UL**

Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

