



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1700	RPM
Power consumption	P _e	240	W
Nominal current	I _{nom}	0.9/0.5	A
Maximum current	I _{max}	1.1/0.7	A
Cos φ		0.67	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	68	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	57	dB(A)
Weight		29.4	Lbs.
Packing dimensions		22.0x22.0x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg 3060 CFM
0.20 in. wg 2740 CFM

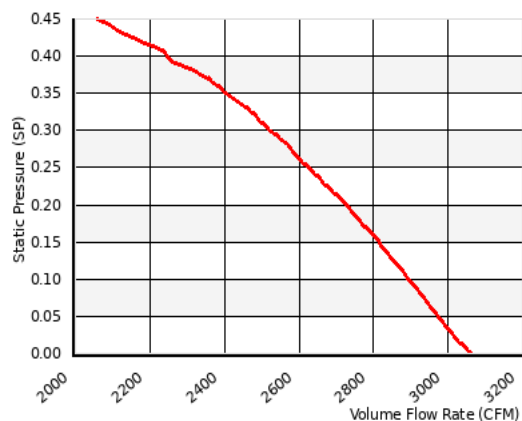


Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C11 - 3 Phase - Y connection - CCW

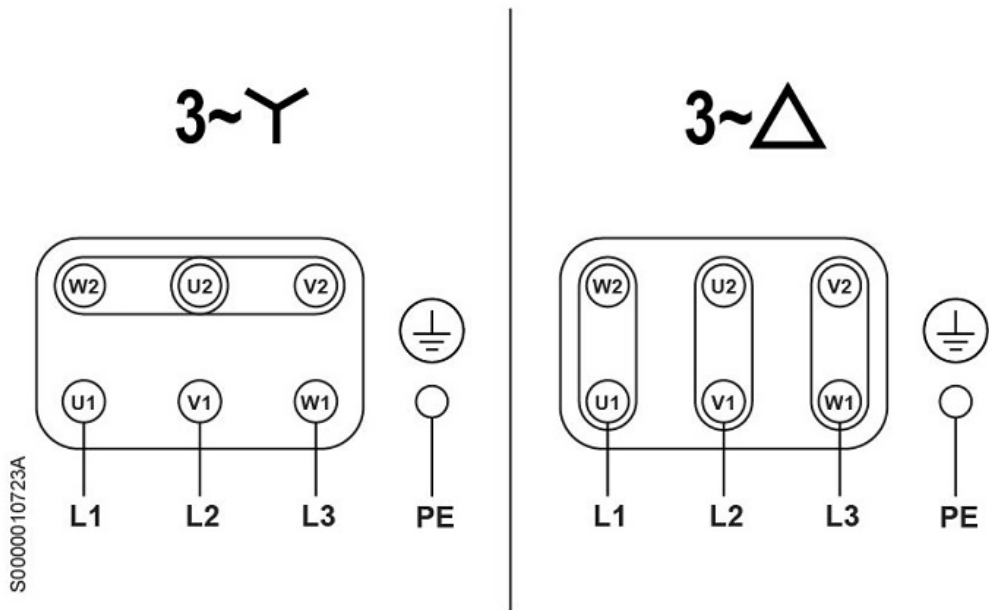

Dimensions

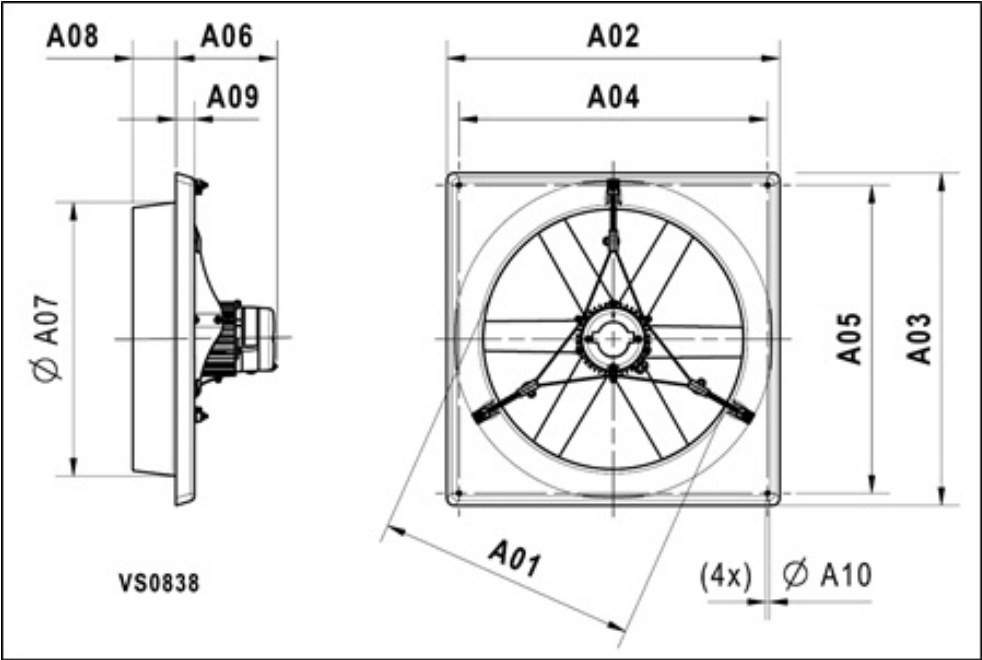

A01:	16.3 inch
A02:	21.4 inch
A03:	21.4 inch
A04:	19.5 inch
A05:	19.5 inch
A06:	7.6 inch
A07:	17.3 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch

