



Technical data

Voltage	U	230	V
Phase	1	~	
Frequency		50	Hz
Speed		1435	RPM
Power consumption	P _e	300	W
Nominal current	I	1.4	A
Maximum current	I	2.4	A
Capacitor		10/400	μF
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level	L _p	71	dB(A)
Sound pressure level distance		6.6	ft
Weight		30.3	Lbs.
Packing dimensions		26.4x26.4x12.4	inch

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

Characteristics

0.00 in. wg 4360 CFM
0.20 in. wg 3800 CFM

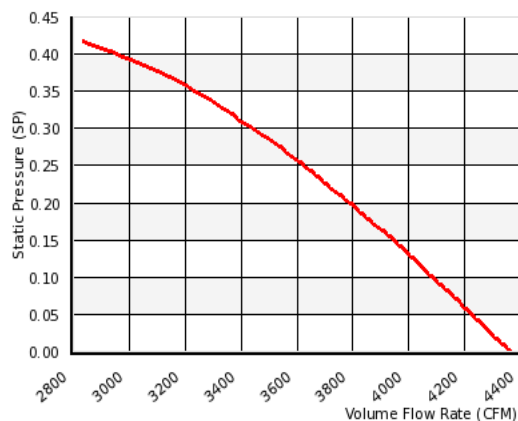


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

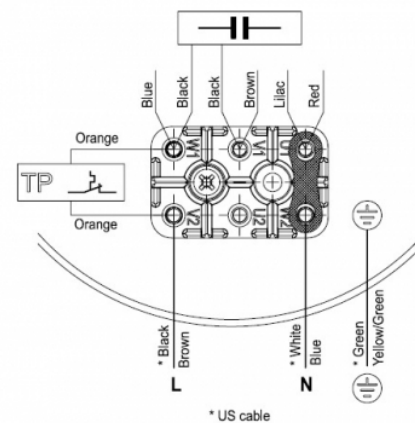

Dimensions

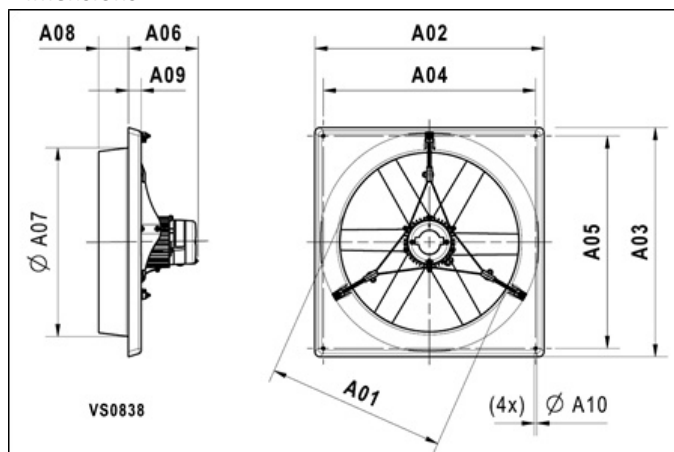

A01:	20.2 inch
A02:	25.5 inch
A03:	25.5 inch
A04:	23.6 inch
A05:	23.6 inch
A06:	7.6 inch
A07:	21.3 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch