



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1455	RPM
Power consumption	P _e	900	W
Nominal current	I _{nom}	3.4/2	A
Maximum current	I _{max}	3.6/2.1	A
Cos φ		0.66	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	76	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	65	dB(A)
Weight		50.5	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	7470 CFM
0.40 in. wg	6240 CFM

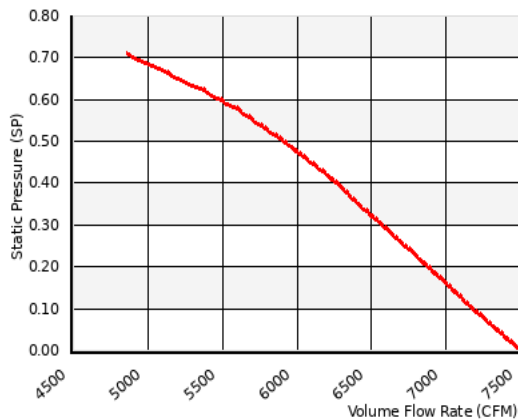

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

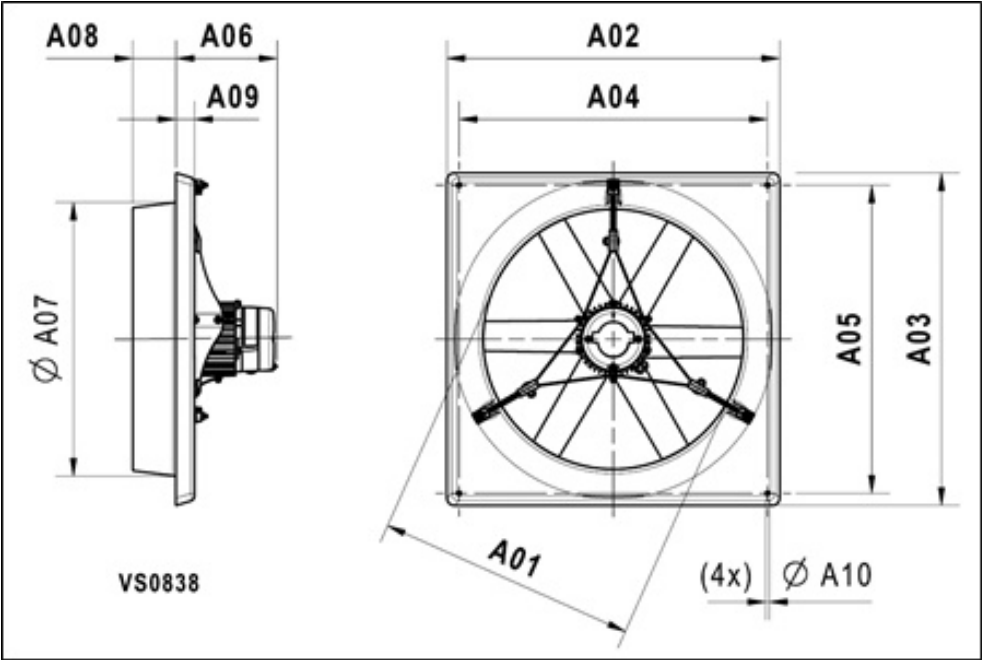

A01:	22.6 inch
A02:	27.6 inch
A03:	27.6 inch
A04:	25.2 inch
A05:	25.2 inch
A06:	9.7 inch
A07:	23.6 inch
A08:	4.1 inch
A09:	1.6 inch
A10:	0.4 inch

