

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	635	RPM
Power consumption	P _e	1800	W
Nominal current	I _{nom}	7.8/4.5	A
Maximum current	I _{max}	8.5/4.9	A
Cos φ		0.58	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		273.6	Lbs.
Packing dimensions		0.7x39.4x39.4	inch

Fan details



Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg	31700 CFM
0.20 in. wg	26350 CFM

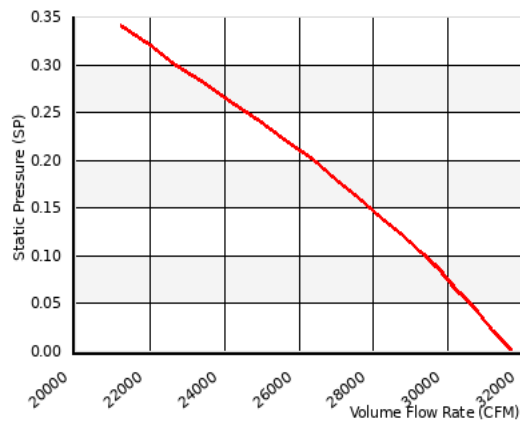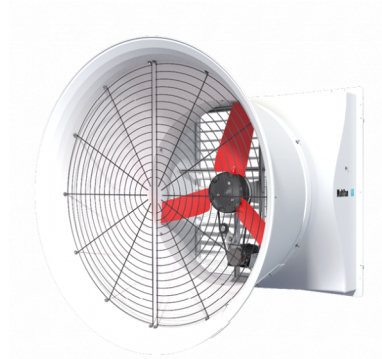


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CW

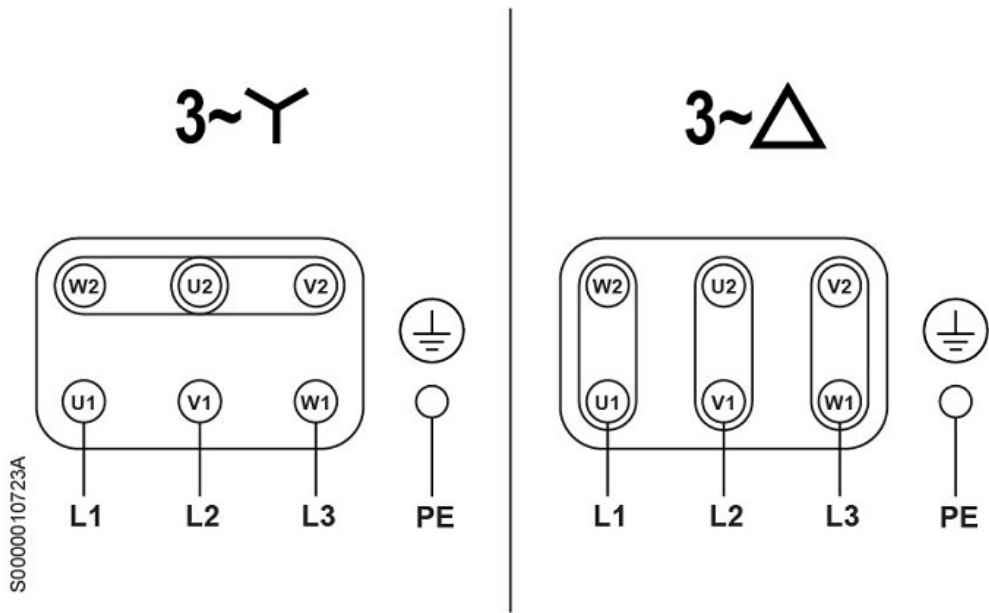

Article number: C4D13A1M10238

FC fans - High volume

