



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	945	RPM
Power consumption	P _e	760	W
Nominal current	I _{nom}	2.7/1.6	A
Maximum current	I _{max}	3.0/1.7	A
Cos φ		0.71	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	77	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	66	dB(A)
Weight		54.1	Lbs.
Packing dimensions		8.1x39.4x39.4	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	12400 CFM
0.20 in. wg	10550 CFM

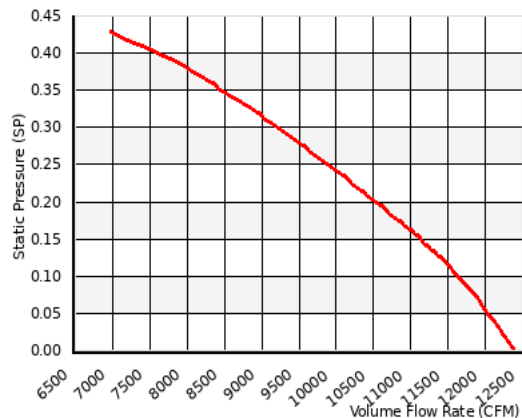

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

