

Technical data

Voltage	U	230	V
Phase	1	~	
Frequency	f	60	Hz
Speed	n	1130	RPM
Power consumption	P _e	410	W
Nominal current	I _{nom}	1.8	A
Maximum current	I _{max}	2.0	A
Cos φ		0.98	
Capacitor		10/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		30.6	kg



Fan details

Impeller blades	4
Impeller type	4
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

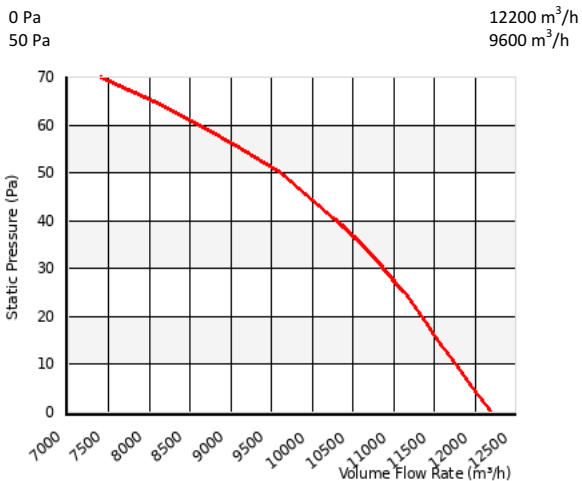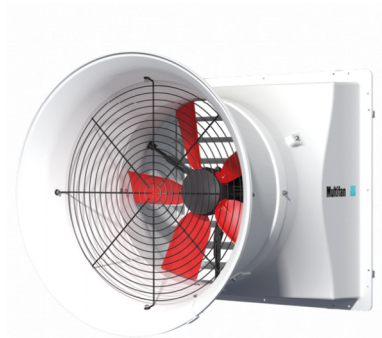


Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

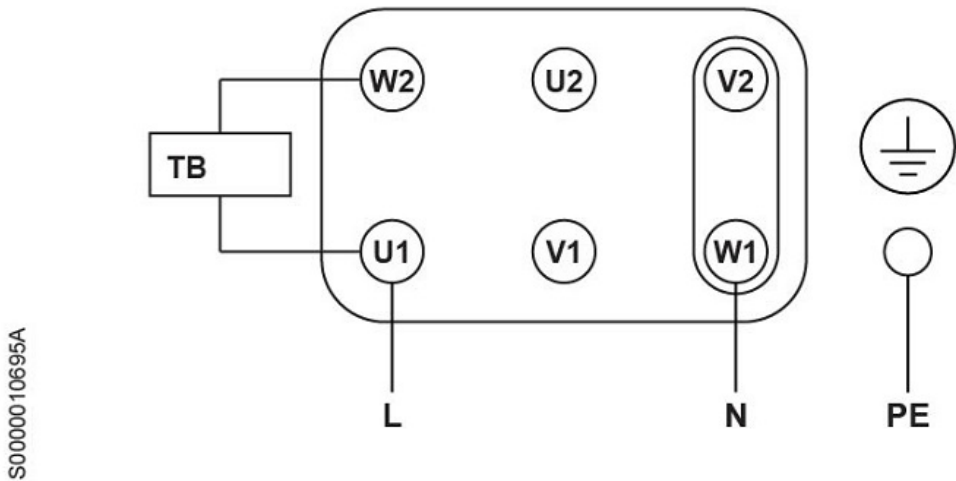

Dimensions

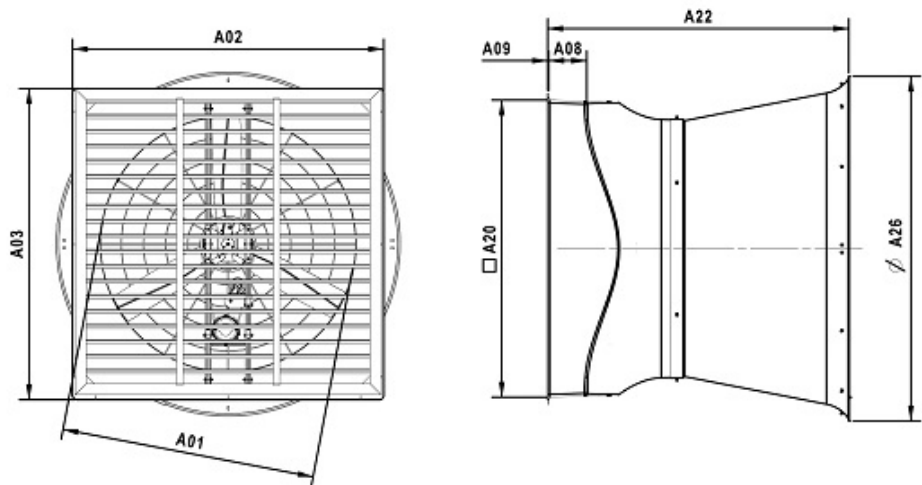

A01:	640 mm
A02:	879 mm
A03:	879 mm
A08:	202 mm
A09:	8 mm
A20:	788 mm
A22:	922 mm
A26:	911 mm