



Technical data

Voltage	U	400-480	V
Phase		3	~
Frequency	f	50/60	Hz
Speed	n	1450	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	2.6	A
Maximum current	I _{max}	3.3	A
Cos φ		0.91	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	83	db(A)
Sound pressure level (23 ft)	L _p (calc.)	72	db(A)
Weight		66.7	Lbs.

Fan details


Impeller blades	6
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 10900 CFM
0.80 in. wg 8420 CFM

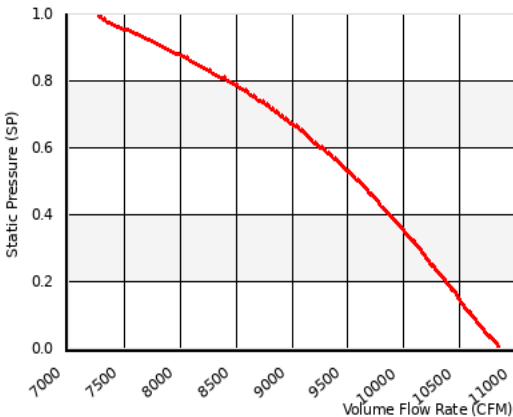


Please note: Picture may deviate from original product




Wiring diagram


CC01 - 3 Phase - Star connected + MFD40T/95T - -

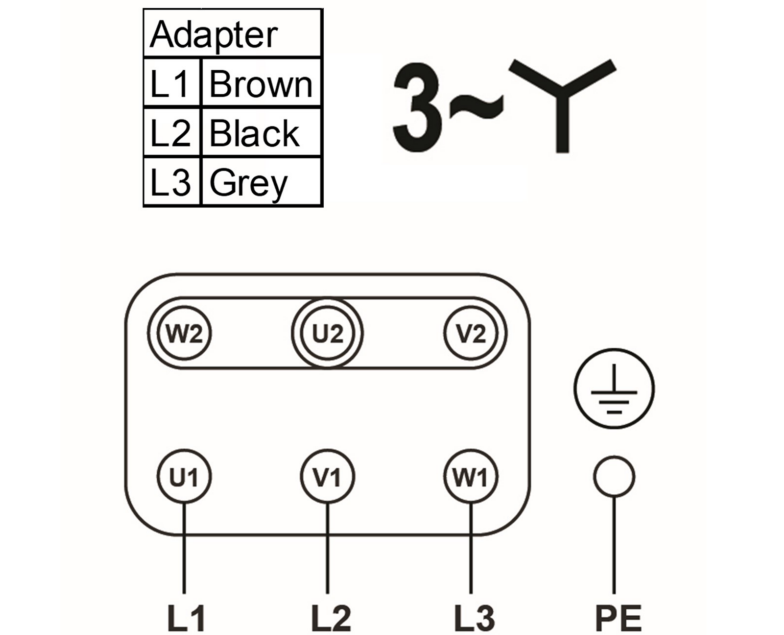

Aln	Dig In 1
10 - 0V	Dig In 1 = NC
0 - 10V	Dig In 1 = 24V

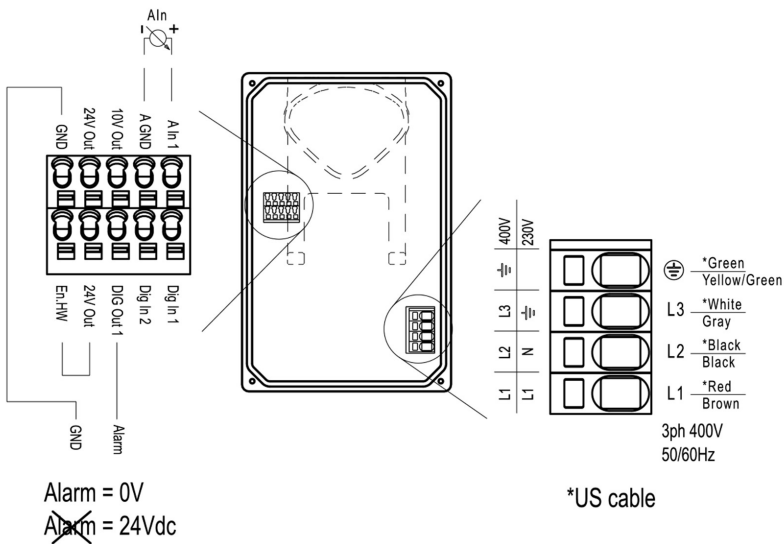

Dimensions

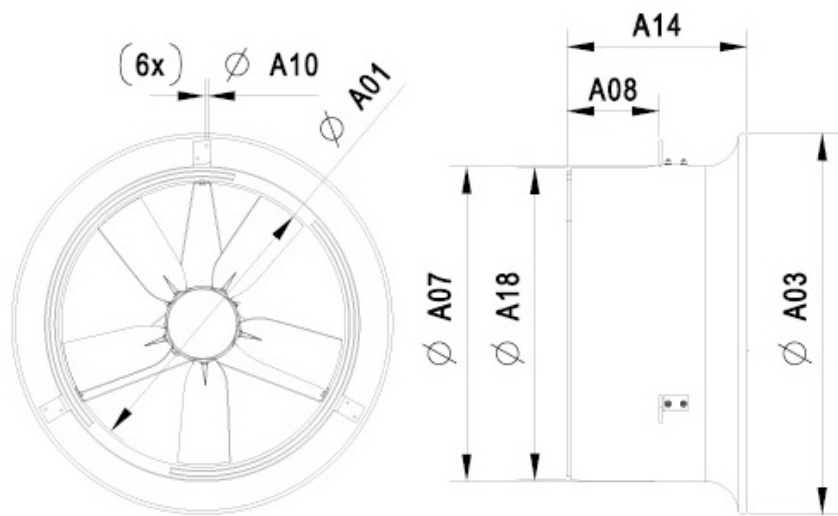

A01:	25.2 inch
A03:	34.1 inch
A07:	28.1 inch
A08:	8.3 inch
A10:	0.4 inch
A14:	16.1 inch

