

Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1130	RPM
Power consumption	P _e	410	W
Nominal current	I _{nom}	1.8	A
Maximum current	I _{max}	2.0	A
Cos φ		0.98	
Capacitor		10/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		67.6	Lbs.

Fan details



Impeller blades	4
Impeller type	4
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg 7180 CFM
0.20 in. wg 5650 CFM

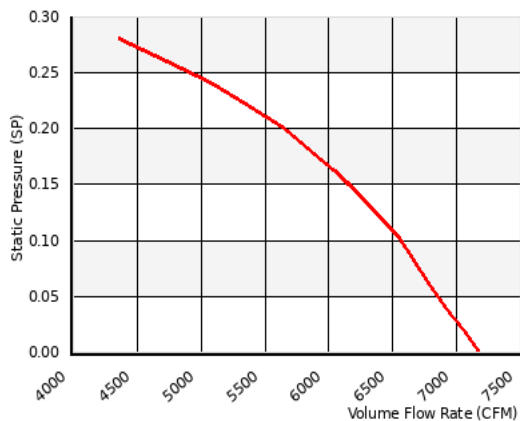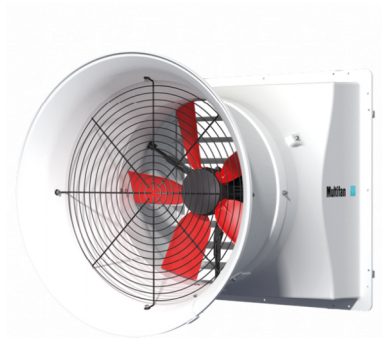


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

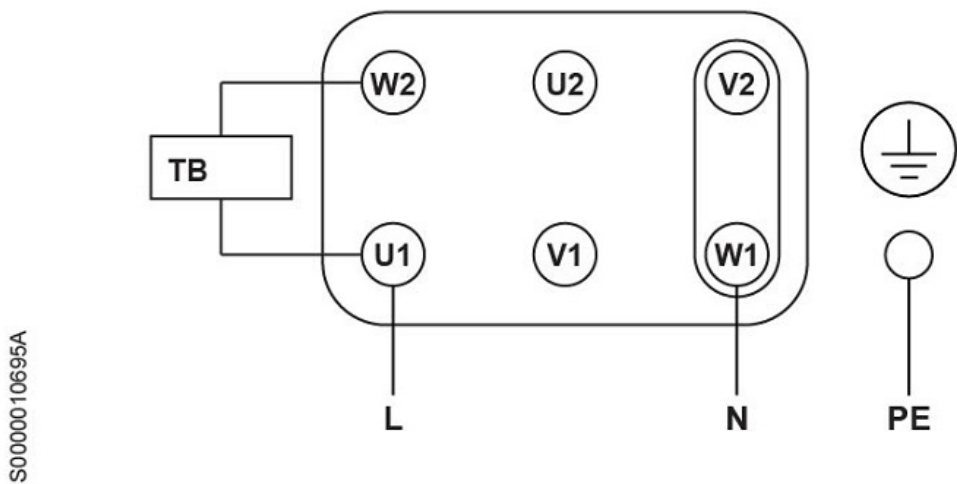

Dimensions

