



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	860	RPM
Power consumption	P _e	770	W
Nominal current	I _{nom}	3.2/1.8	A
Maximum current	I _{max}	3.6/2.1	A
Cos φ		0.53	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Packing dimensions		204.5x1000x1000	mm

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa 21600 m³/h
50 Pa 17800 m³/h

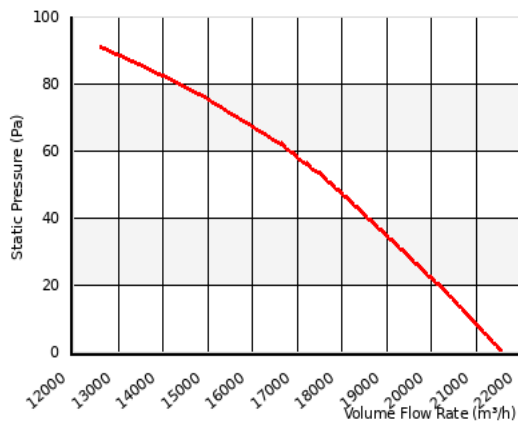


Please note: Picture may deviate from original product



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

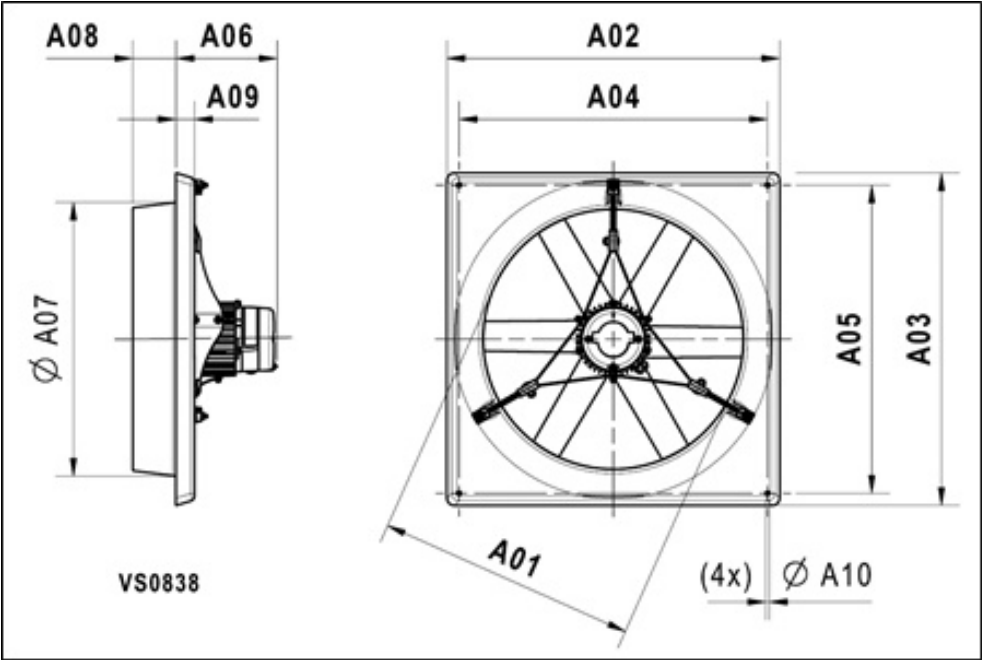

A01:	646 mm
A02:	775 mm
A03:	775 mm
A04:	715 mm
A05:	715 mm
A06:	247 mm
A07:	670 mm
A08:	105 mm
A09:	40 mm
A10:	10 mm