

Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1660	RPM
Power consumption	P _e	380	W
Nominal current	I _{nom}	1.6/0.9	A
Maximum current	I _{max}	1.8/1.1	A
Cos φ		0	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	

Fan details

Impeller blades	3
Impeller type	4
Impeller system	K
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0 Pa	8500 m ³ /h
------	------------------------



Please note: Picture may deviate from original product

Approval(s)




Wiring diagram
C11 - 3 Phase - Y connection - CCW



Basket fans

A01:	610 mm
A03:	683 mm
A13:	206 mm
A14:	350 mm
A29:	32 mm
A30:	115 mm

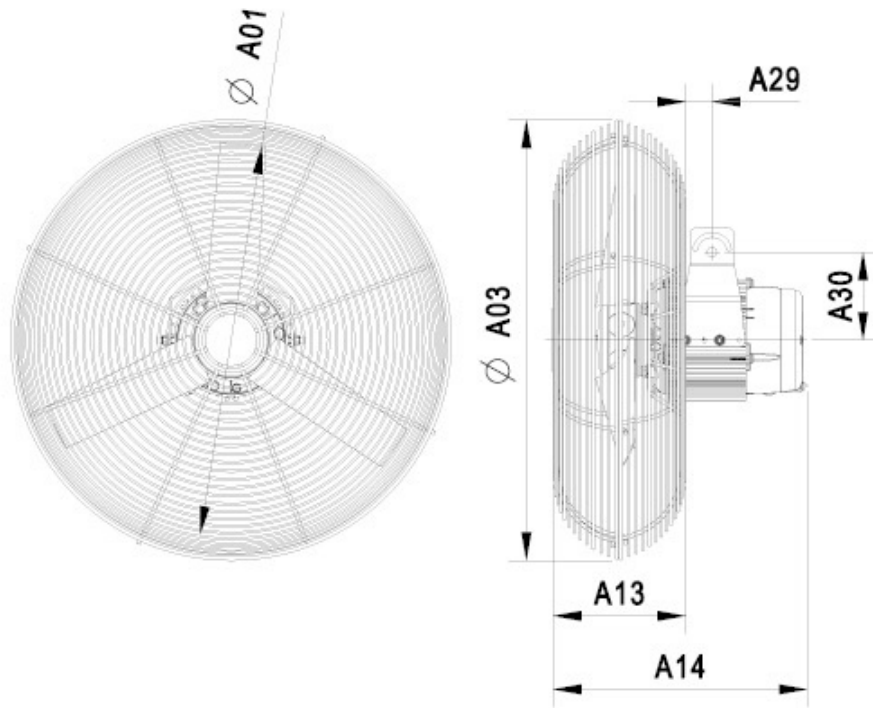

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com