

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	890	RPM
Power consumption	P _e	770	W
Nominal current	I _{nom}	2.8/1.6	A
Maximum current	I _{max}	3.0/1.7	A
Cos φ		0.69	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		89.9	Lbs.
Packing dimensions		43.3x7.5x5.9	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	11950 CFM
0.20 in. wg	9180 CFM

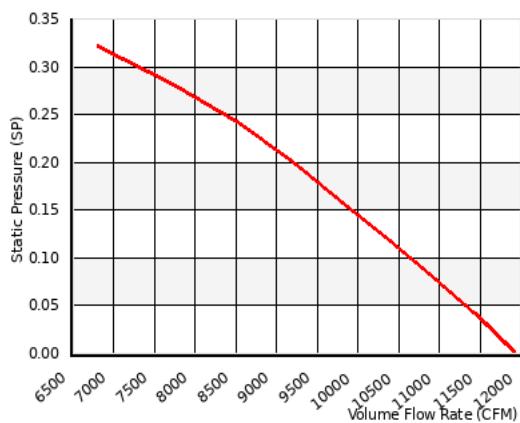

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

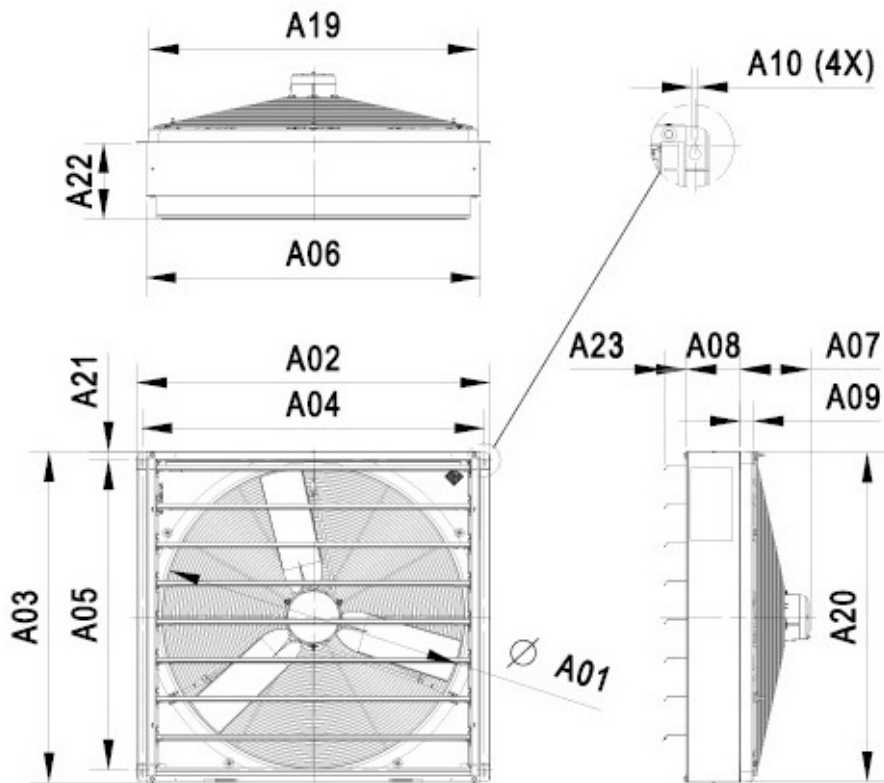

A01:	36.0 inch
A02:	42.5 inch
A03:	39.9 inch
A04:	41.2 inch
A05:	37.3 inch
A06:	40.2 inch
A07:	10.7 inch
A08:	6.5 inch
A09:	1.6 inch
A10:	0.3 inch
A19:	39.6 inch
A20:	39.6 inch
A21:	1.0 inch
A22:	9.2 inch
A23:	2.8 inch