



Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	560	RPM
Power consumption	P _e	1950	W
Nominal current	I _{nom}	12.5	A
Maximum current	I _{max}	14.0	A
Cos φ		0.68	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		204.0	Lbs.
Packing dimensions		10.2x39.4x39.4	inch

Fan details


Impeller blades	3
Impeller type	12
Impeller system	B
Impeller material	PG

Control options


Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	30600 CFM
0.20 in. wg	24250 CFM

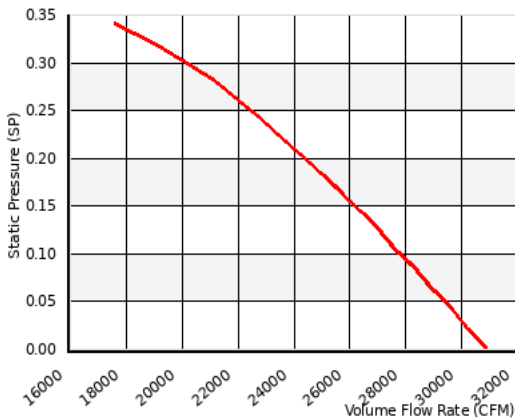

Speed control diagram

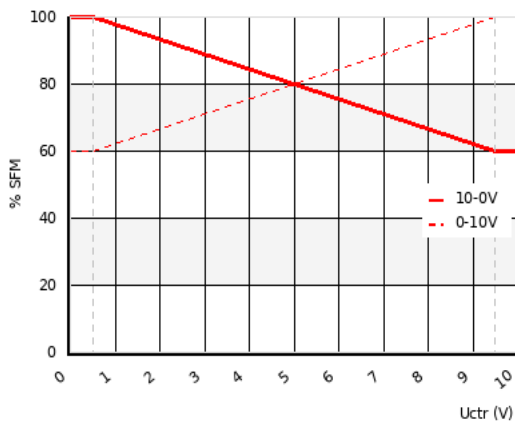

Please note: Picture may deviate from original product

Approval(s)



VOSTERMANS
VENTILATION


Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Dimensions

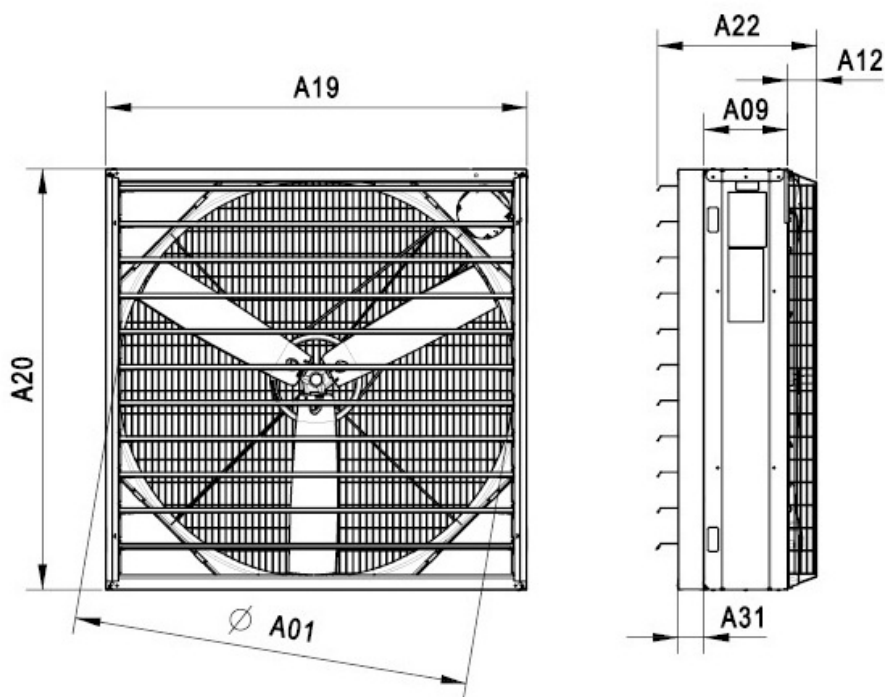

A01:	54.1 inch
A09:	11.6 inch
A12:	3.8 inch
A19:	58.3 inch
A20:	58.3 inch
A22:	21.6 inch
A31:	3.3 inch