



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	820	RPM
Power consumption	P _e	680	W
Nominal current	I _{nom}	3.3	A
Maximum current	I _{max}	4.2	A
Cos φ		0.91	
Capacitor		14/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Packing dimensions		32.7x32.7x16.1	inch

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics


0.00 in. wg 11900 CFM
0.20 in. wg 9180 CFM

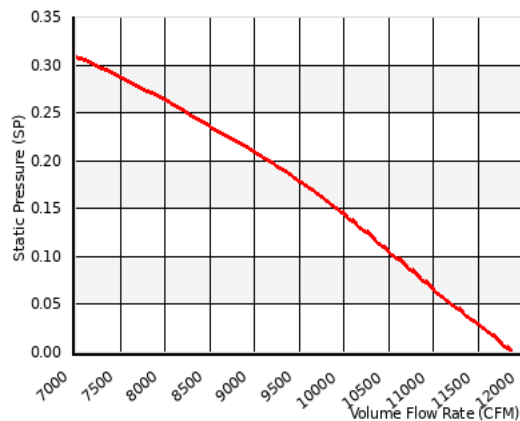

Please note: Picture may deviate from original product

Wiring diagram
C1 - 1 Phase - Standard - CCW

S0000010695A

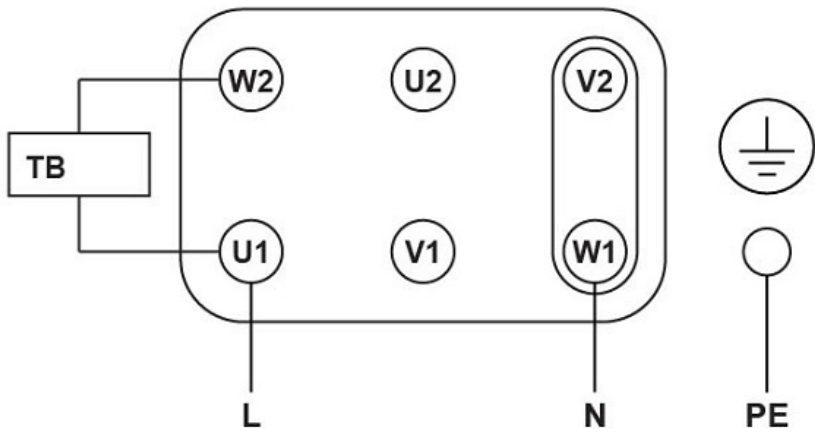

Dimensions

