



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	60	Hz
Speed	n	1100	RPM
Power consumption	P _e	610	W
Nominal current	I _{nom}	2.7	A
Maximum current	I _{max}	3.4	A
Cos φ		1	
Capacitor		14/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		53.8	Lbs.
Packing dimensions		31.5x31.1x15.6	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0.00 in. wg 7240 CFM
0.20 in. wg 6300 CFM

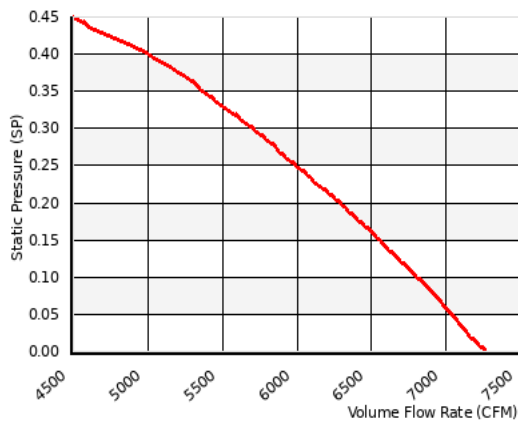


Please note: Picture may deviate from original product

Approval(s)


Motor approval
cULus



Wiring diagram
C1 - 1 Phase - Standard - CCW

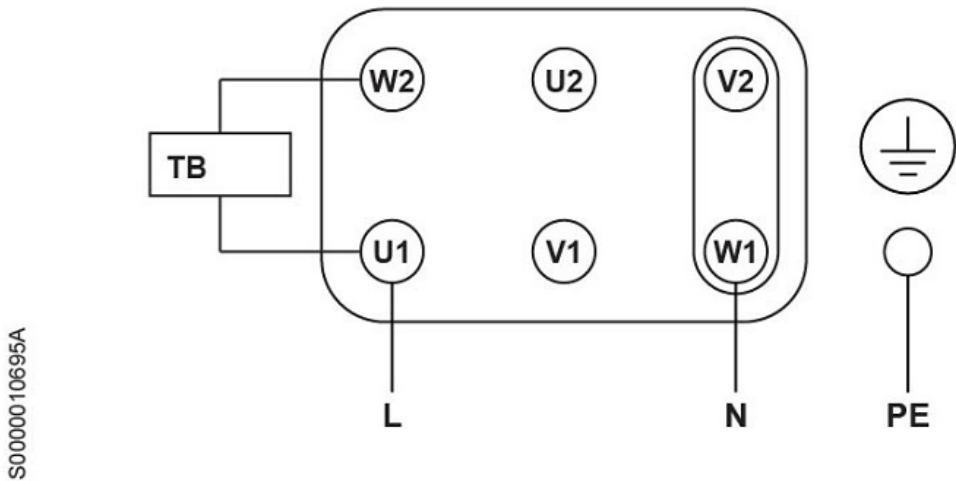

Dimensions

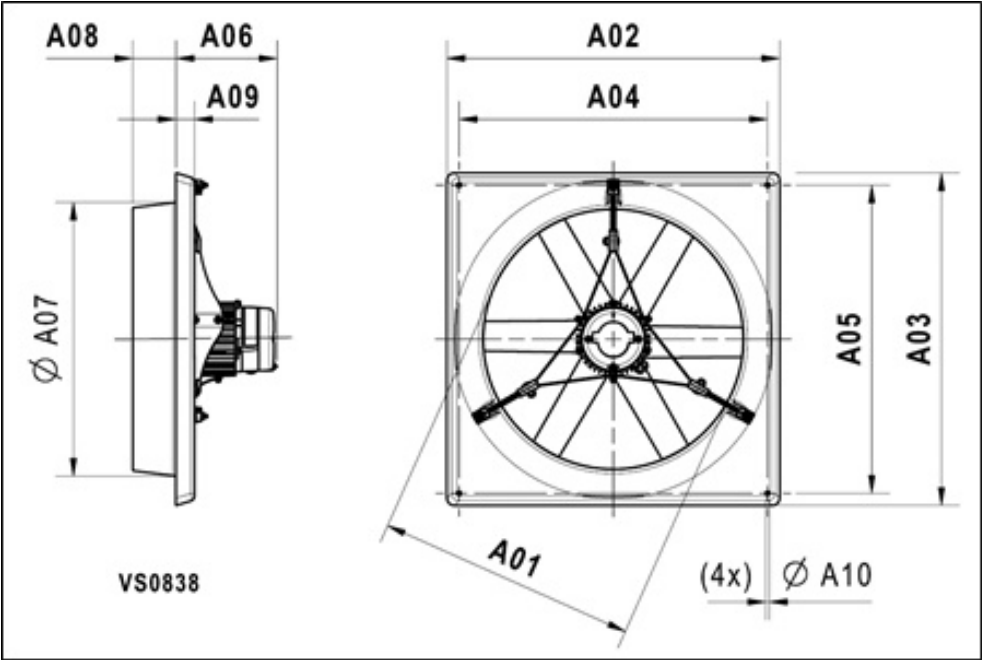

A01:	25.4 inch
A02:	30.5 inch
A03:	30.5 inch
A04:	28.1 inch
A05:	28.1 inch
A06:	9.7 inch
A07:	26.4 inch
A08:	4.1 inch
A09:	1.6 inch
A10:	0.4 inch

