



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1600	RPM
Power consumption	P _e	1950	W
Nominal current	I _{nom}	6.1/3.5	A
Maximum current	I _{max}	7.3/4.2	A
Cos φ		0.64	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		51.6	Lbs.
Packing dimensions		31.5x31.1x15.6	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	10650 CFM
0.60 in. wg	8360 CFM

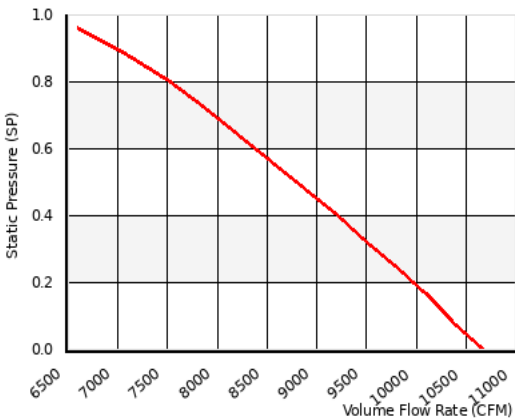

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

C7 - 3 Phase - Y connected with 2x TP - CCW

S0000010701A

